
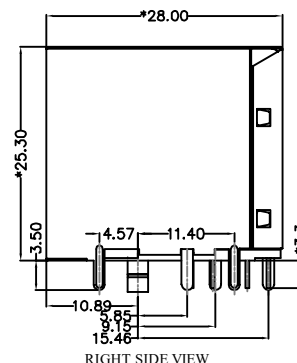


REACH & RoHS
COMPLIANT

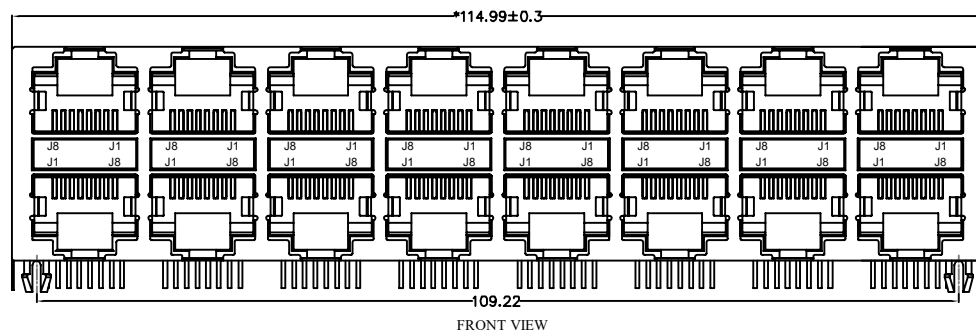

MATERIAL:




HOUSING: PBT,UL94V-0,BLACK.
TERMINALS BRACKET: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE Ø=0.46MM, G/FU" GOLD PLATING.
SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
 OPERATING TEMPERATURE: -40°C ~ +85°C.
 STORAGE TEMPERATURE: -40°C ~ +85°C.
 ALL CRITICAL DIMENSIONS WITH "M"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

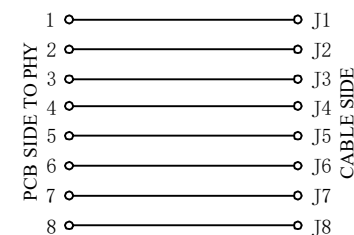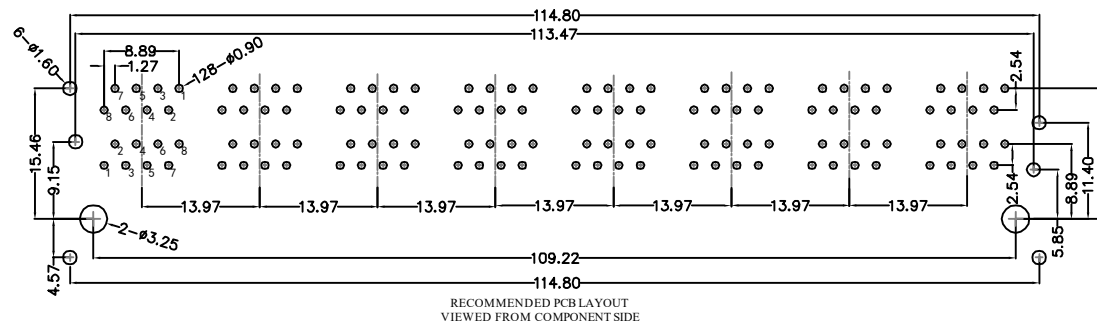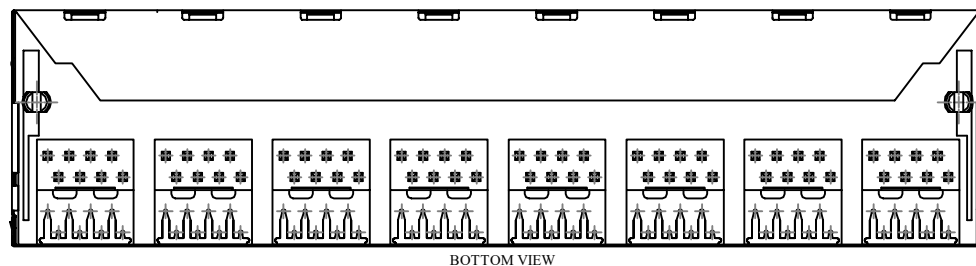

TITLE:

RJ45 5921 2*8 8P8C

PART NO.:

SYT59212888GWA1DY1A022短体

REMARK:

SIZE
A4

SACLE
1:1

SHEET
1/1

UNITS
MM[INCH]REV
A0

GENERAL TOLERANCES
UNLESS SPECIFIED

	$x \pm 0.35$
	$.x \pm 0.30$
	$.xx \pm 0.25$
	$.xxx \pm 0.10$

TOLERANCES SPECIFIED	APPROVED BY: Geoffrey.Song
----------------------	-------------------------------

$x^\circ \pm 3.0^\circ$	CHECKED BY: Elvis.Song
$.x^\circ \pm 2.0^\circ$	

.xx°±1.5°	DESIGND BY: Sunny.Xu
.xxx°±1.0°	

VCOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM