




1	2	3	4	5	6	7	8		
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION	BY	DATE
						A0	NEW	Sunny.Xu	2018.05.26

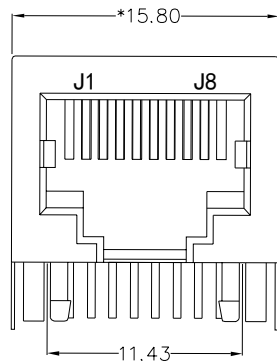


FRONT VIEW

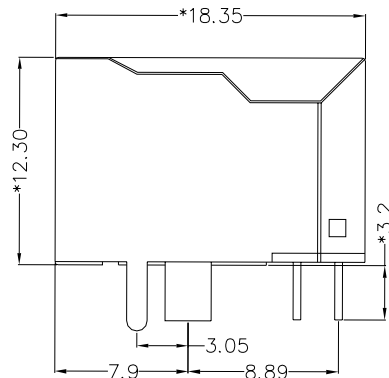

RIGHT SIDE VIEW

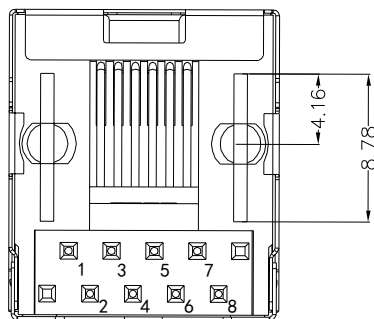

BOTTOM VIEW

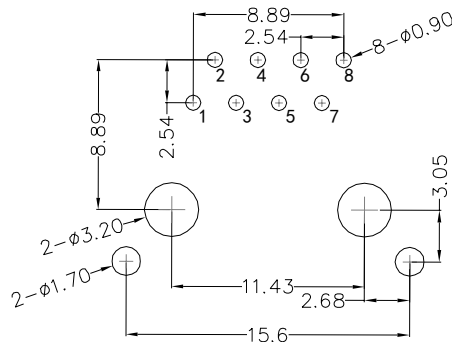

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: PA46,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$, G/FU" GOLD PLATING.

SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ALL CRITICAL DIMENSIONS WITH "H"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.


INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL


AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

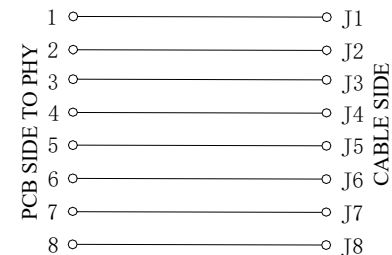

 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: RJ45直通 56带屏蔽无灯	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: SYT56221118GWA3D1Y1027	SACLE 1:1	REV A0	$x\pm0.35$	$x^{\circ}\pm3.0^{\circ}$	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018		REMARK:	SHEET 1/1		$.xx\pm0.25$	$.xx^{\circ}\pm1.5^{\circ}$	DESIGND BY: Sunny.Xu
WEB: WWW.WOHU-TEK.COM					$.xxx\pm0.10$	$.xxx^{\circ}\pm1.0^{\circ}$	