




1	2	3	4	5	6	7	8			
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION		BY	DATE
						A0	NEW		Sunny.Xu	2017.12.20




FRONT VIEW

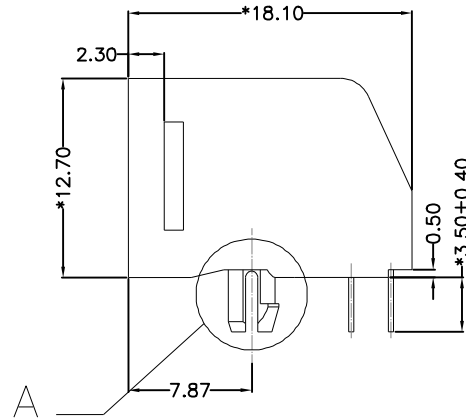


RIGHT SIDE VIEW



BOTTOM VIEW

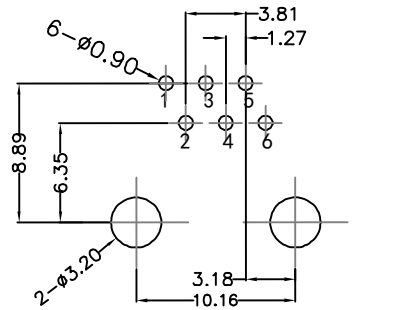

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE



A(2:1)

MATERIAL:

HOUSING: PBT,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: -40℃~+85℃.

STORAGE TEMPERATURE: -40℃~+85℃.

ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:


VOLTAGE: 125 VOLTS AC.


CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

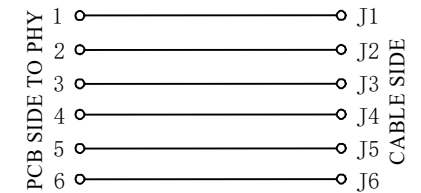

 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd			TITLE: 5722 1*1 6P6C 带耳 全塑		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT5722E1166IWA1DB4		SACLE 1:1	REV A0	$x\pm0.35$	$x^{\circ}\pm3.0^{\circ}$	CHECKED BY: Elvis.Song	
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM			REMARK:		SHEET 1/1		$.xx\pm0.25$	$.xx^{\circ}\pm1.5^{\circ}$	DESIGND BY: Sunny.Xu	
							$.xxx\pm0.10$	$.xxx^{\circ}\pm1.0^{\circ}$		