




1	2	3	4	5	6	7	8		
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION	BY	DATE
						A0	NEW	ZG.HU	2018.05.12

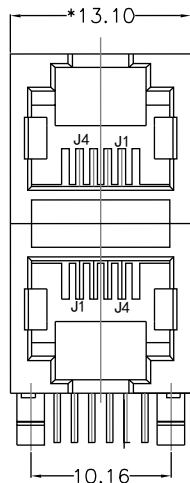


FRONT VIEW

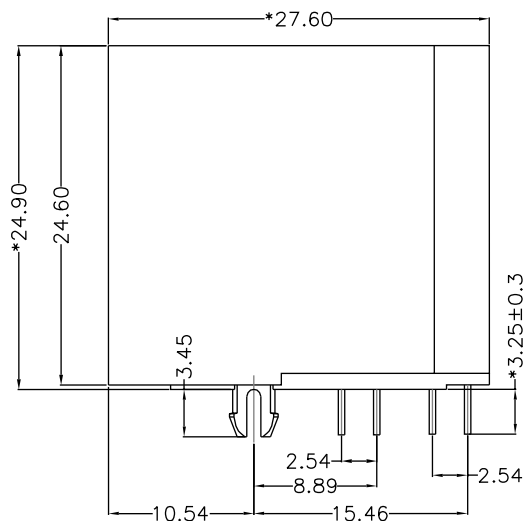

RIGHT SIDE VIEW

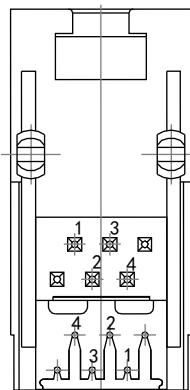

BOTTOM VIEW



RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: PBT,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE Ø=0.46MM, G/FU" GOLD PLATING.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: -40℃~+85℃.

STORAGE TEMPERATURE: -40℃~+85℃.

ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING : 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL


AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.



A	 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: RJ11 5921 2*1 6P4C	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT59212164IWA1DY1G022短体	SACLE 1:1	REV A0	.x±0.35	x°±3.0°	CHECKED BY:	
	TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 1/1		.xx±0.25	.xx°±1.5°	DESIGND BY:	
	1	2	3	4	5	6	7	8	