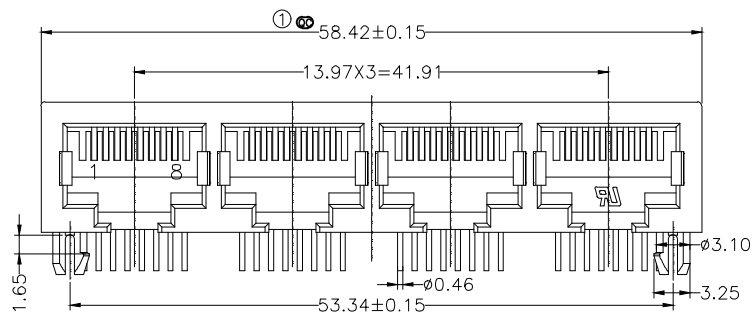


NOTES:

MATERIAL:

- 1.HOUSING MATERIAL :THERMOPLASTIC(UL94V-0).
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3.PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.


MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- 2.OPERATION : -40°C TO $+85^{\circ}\text{C}$.
- 3.Harmful material control follow RoHs.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

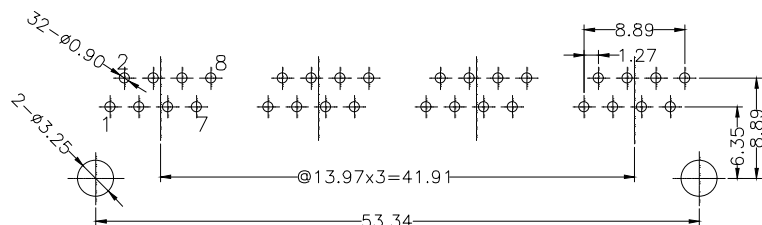

PC Board Layout

TITLE: 56 1X4 10P8C JACK
(不包壳, L=58.42mm)

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WH5605-114080211

SACLE
1:1

REV
A0


$x \pm 0.35$
 $.x \pm 0.30$

$x^{\circ} \pm 3.0^{\circ}$
 $.x^{\circ} \pm 2.0^{\circ}$

CHECKED BY:
Elvis.Song

REMARK:

SHEET
1/1



$.xx \pm 0.25$
 $.xxx \pm 0.10$

$.xx^{\circ} \pm 1.5^{\circ}$
 $.xxx^{\circ} \pm 1.0^{\circ}$

DESIGND BY:
Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM