




REACH & RoHS
COMPLIANT

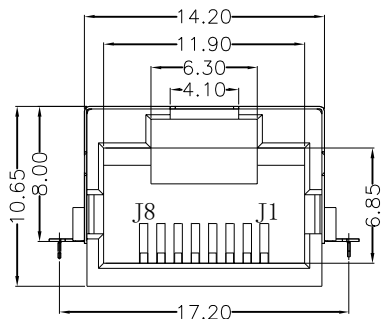


FRONT VIEW



RIGHT SIDE VIEW

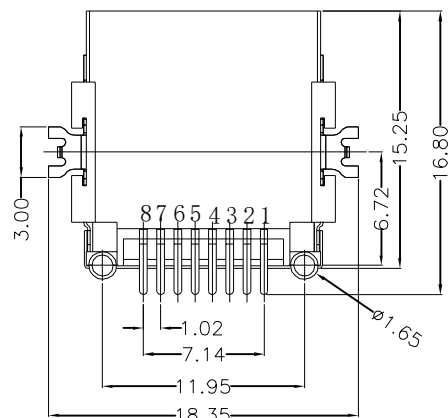

BOTTOM VIEW

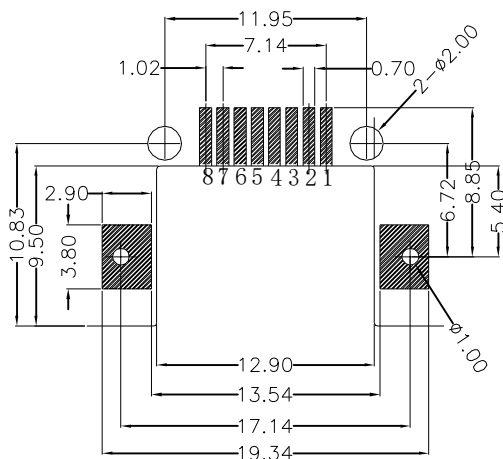

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: LCP,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE T=0.3MM, 1U" GOLD PLATING.

SHIELD: C2680,T=0.20MM.

ELECTRICAL:

VOLTAGE: 150 VOLTS AC.

CURRENT RATING : 1.5AMP.


DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.

INSULATION RESISTANCE: 500 MEGA OHMS MIN.

CONTACT RESISTANCE: 40 MILLIOHMS MAX.

OPERATING TEMPERATURE: -40℃~+80℃.

ALL CRITICAL DIMENSIONS WITH "***"

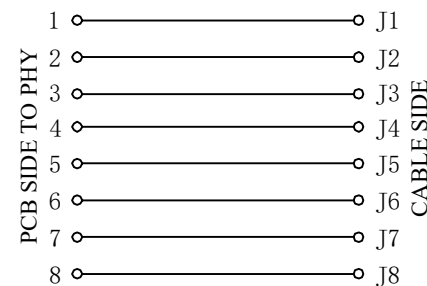

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
RJ45 SMT 沉板式

PART NO.:
SYTCB801188GWA6SB1133

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM