



REACH & RoHS
COMPLIANT

SUGGESTED PANEL OPENING:

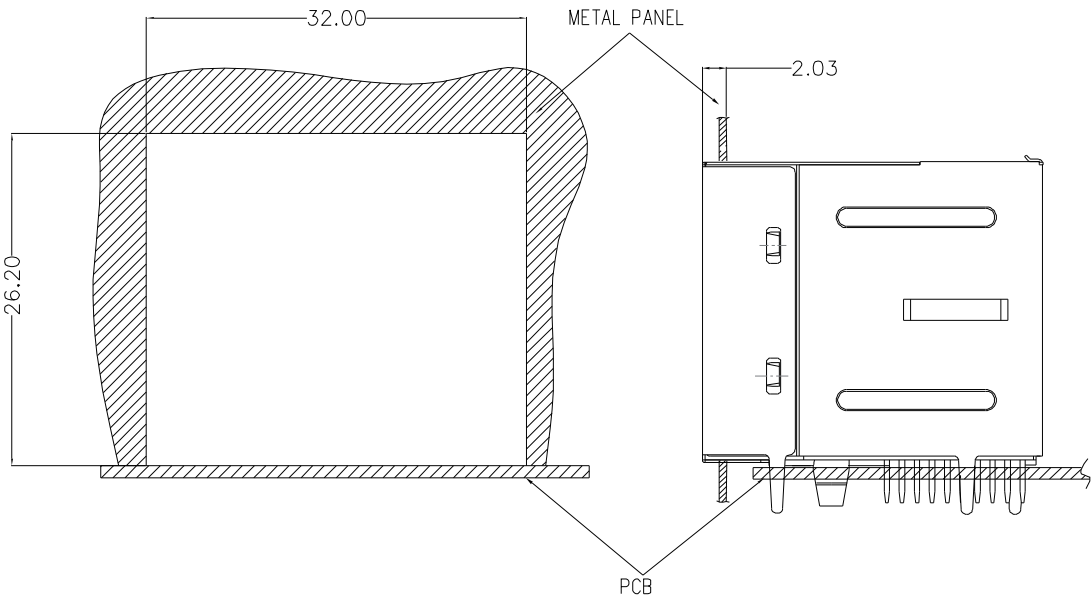

UNIT: MM / INCH
TOLERANCES: ± 0.10 / 0.004

KEEP-OUT AREA (COMPONENT SIDE VIEW):

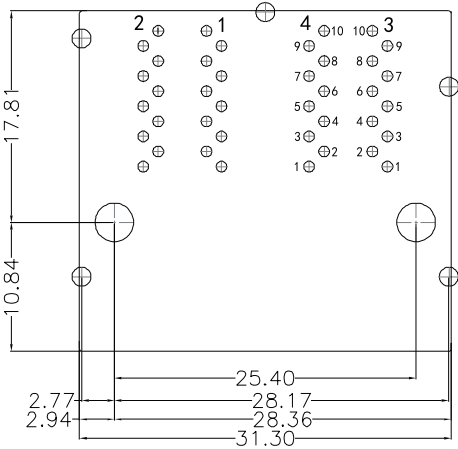

PLUG-IN SIDE

UNIT: MM / INCH
TOLERANCES: ± 0.10 / 0.004

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
RJ45 2X2 100BASE

PART NO.:
SYT22B102GWA5D068

REMARK:


SIZE
A4

SACLE
1:1

SHEET
2/4

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED


$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song


DESIGND BY:
Sunny.Xu

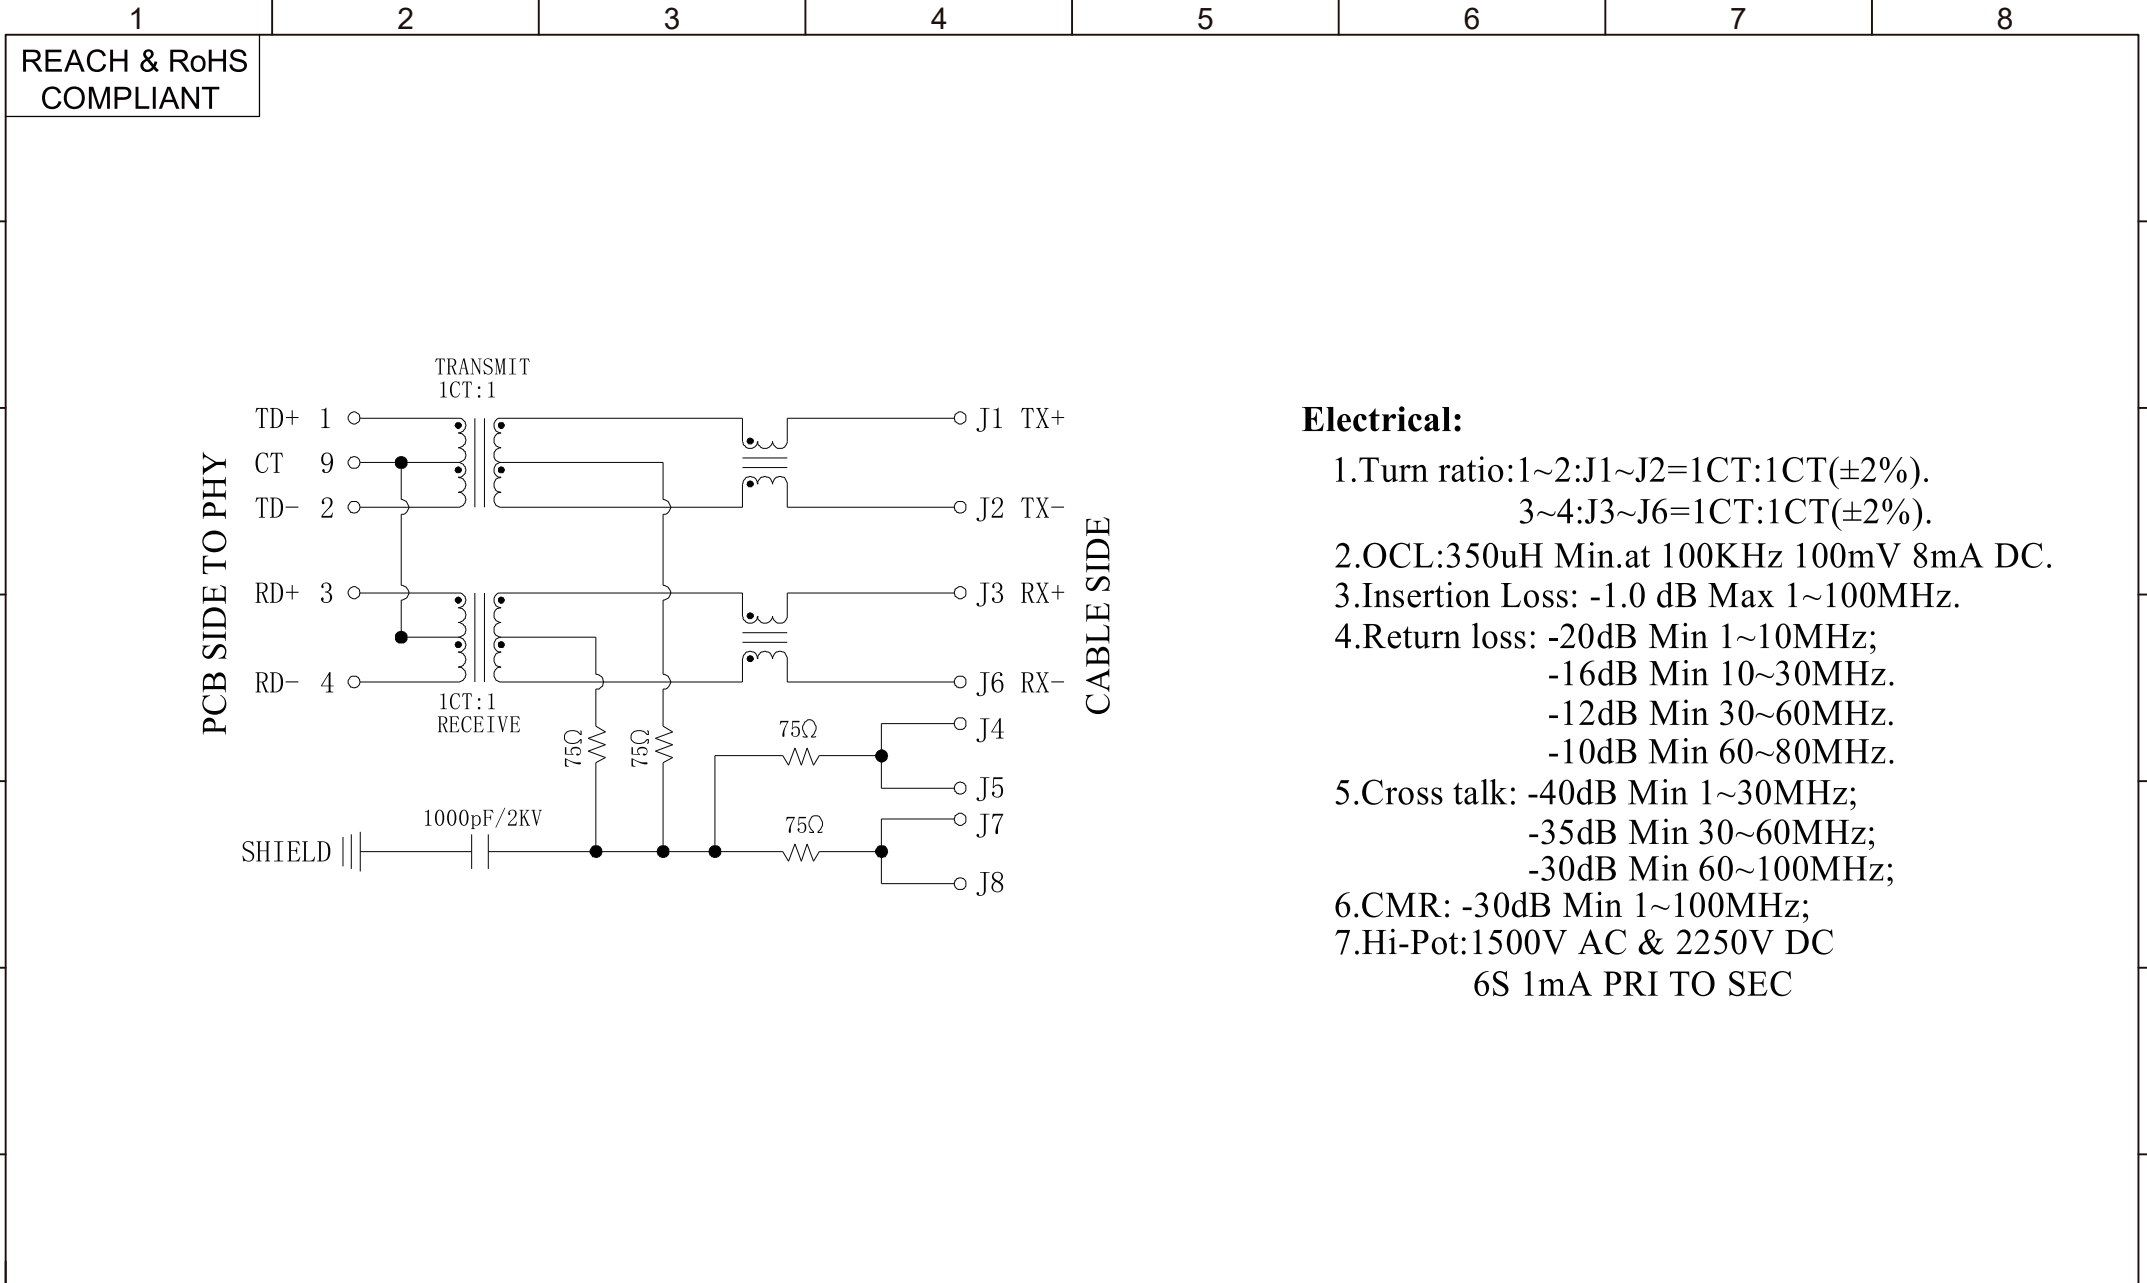

VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd			TITLE: RJ45 2X2 100BASE		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT22B102GWA5D068		SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY:	
			REMARK:		SHEET 3/4		.xx±0.25	.xx°±1.5°	DESIGND BY:	
TEL: +86 400 1048 018		WEB: WWW.WOHU-TEK.COM					.xxx±0.10	.xxx°±1.0°	Sunny.Xu	


REACH & RoHS
COMPLIANT

PROFILE OF WAVE SOLDER

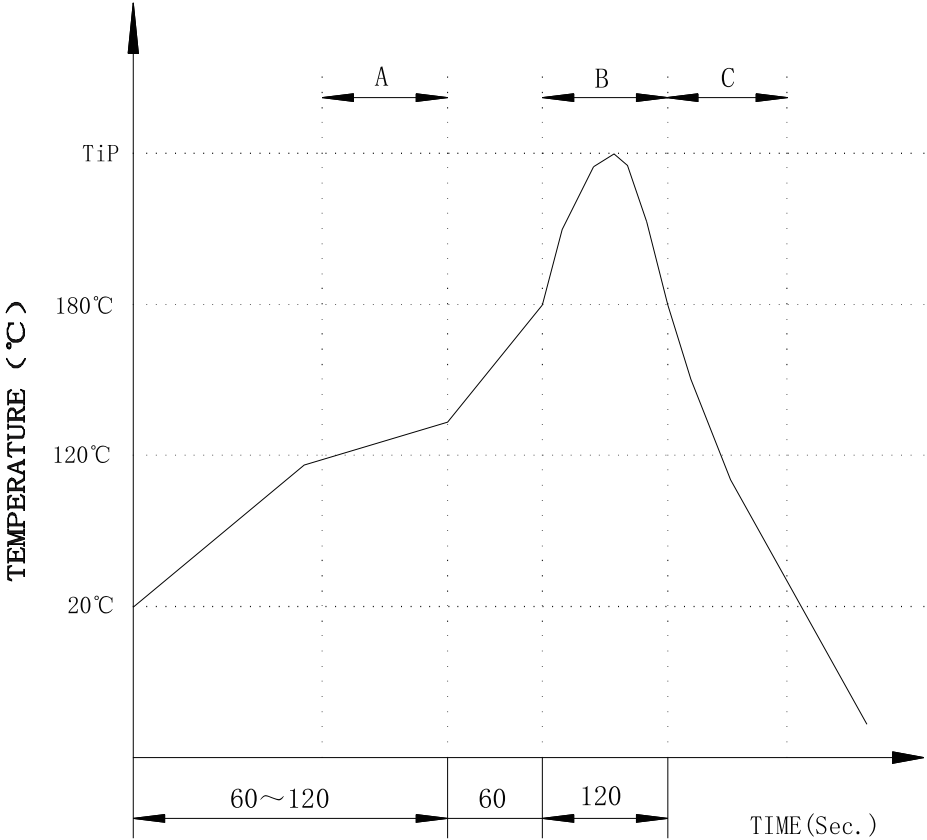

A.Preheating B.Soldering C.Gradual Cooling
Tip temperature:260±5°C.
Tip temperature time:5Sec Max.
Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

Remarks: after wave soldering, the plastic positioning columns
of the product which under the PCB will be slightly melted,
but it won't affect its function.

A	 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: RJ45 2X2 100BASE	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
			PART NO.: SYT22B102GWA5D068	SACLE 1:1	REV A0	.x±0.35	x°±3.0°	CHECKED BY:
	TEL: +86 400 1048 018	WEB: WWW.WOHU-TEK.COM	REMARK:	SHEET 4/4		.xx±0.25	.xx°±1.5°	DESIGND BY:
						.xxx±0.10	.xxx°±1.0°	Sunny.Xu