




1	2	3	4	5	6	7	8		
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION	BY	DATE
						A0	NEW	ZG.Hu	2018.01.11




TOP VIEW




FRONT VIEW



RIGHT SIDE VIEW



BOTTOM VIEW

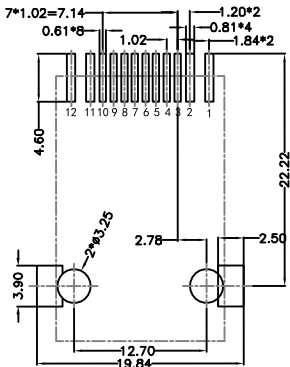


RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE




MATERIAL:


HOUSING: LCP,UL94V-0,BLACK.
 TERMINALS BRACKET: LCP,UL94V-0,BLACK.
 SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.
 TERMINAL: PHOSPHOR BRONZE C5210,T=0.35MM,
 6U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:


DURABILITY: 750 CYCLES MIN.
 MATING FORCE: 23N MAX.
 OPERATING TEMPERATURE: -40°C~+85°C.
 STORAGE TEMPERATURE: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH "±"

A	 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 100BASE 贴片	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT311B093DA2A7S009	SACLE 1:1	REV A0	.xx±0.35	.x°±3.0°	CHECKED BY:	
	TEL: +86 400 1048 018		REMARK:	SHEET 1/4		.xx±0.25	.xx°±1.5°	DESIGND BY:	
						.xxx±0.10	.xxx°±1.0°	Sunny.Xu	

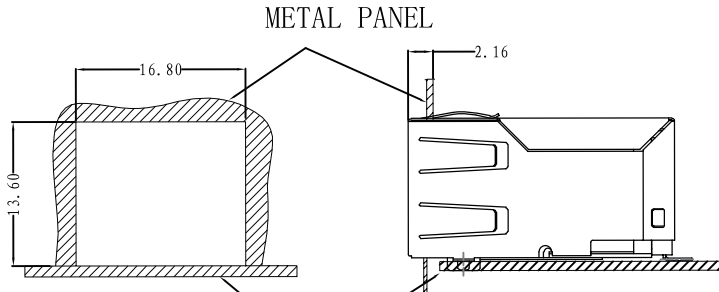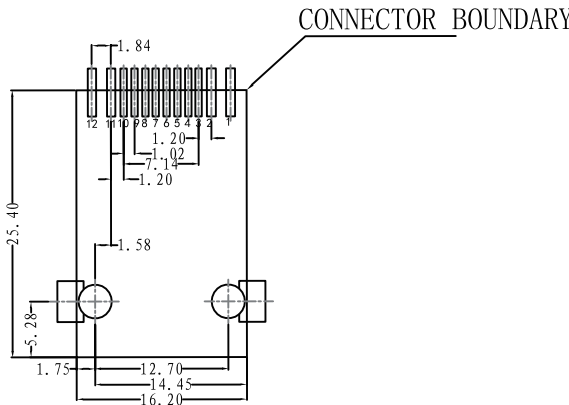
1	2	3	4	5	6	7	8								
REACH & RoHS COMPLIANT				<table><tr><td>REV.</td><td>ECN / DESCRIPTION</td><td>BY</td><td>DATE</td></tr><tr><td>A0</td><td>NEW</td><td>ZG.Hu</td><td>2018.01.11</td></tr></table>				REV.	ECN / DESCRIPTION	BY	DATE	A0	NEW	ZG.Hu	2018.01.11
REV.	ECN / DESCRIPTION	BY	DATE												
A0	NEW	ZG.Hu	2018.01.11												
RECOMMENDED PANEL CUTOUT (REFERENCE ONLY) :				KEEP-OUT AREA (COMPONENT SIDE VIEW) :											
 UNIT: MM / INCH TOLERANCES: ±0.10 / 0.004 REFERENCE ONLY				 UNIT: MM / INCH TOLERANCES: ±0.10 / 0.004											
 苏州沃虎电子科技有限公司 Su Zhou VooHu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 100BASE 贴片		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song							
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		PART NO.: SYT311B093DA2A7S009		SACLE 1:1	REV A0	.xx±0.35	x°±3.0°	CHECKED BY: Elvis.Song							
		REMARK:		SHEET 2/4		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu							
						.xxx±0.10	.xxx°±1.0°								

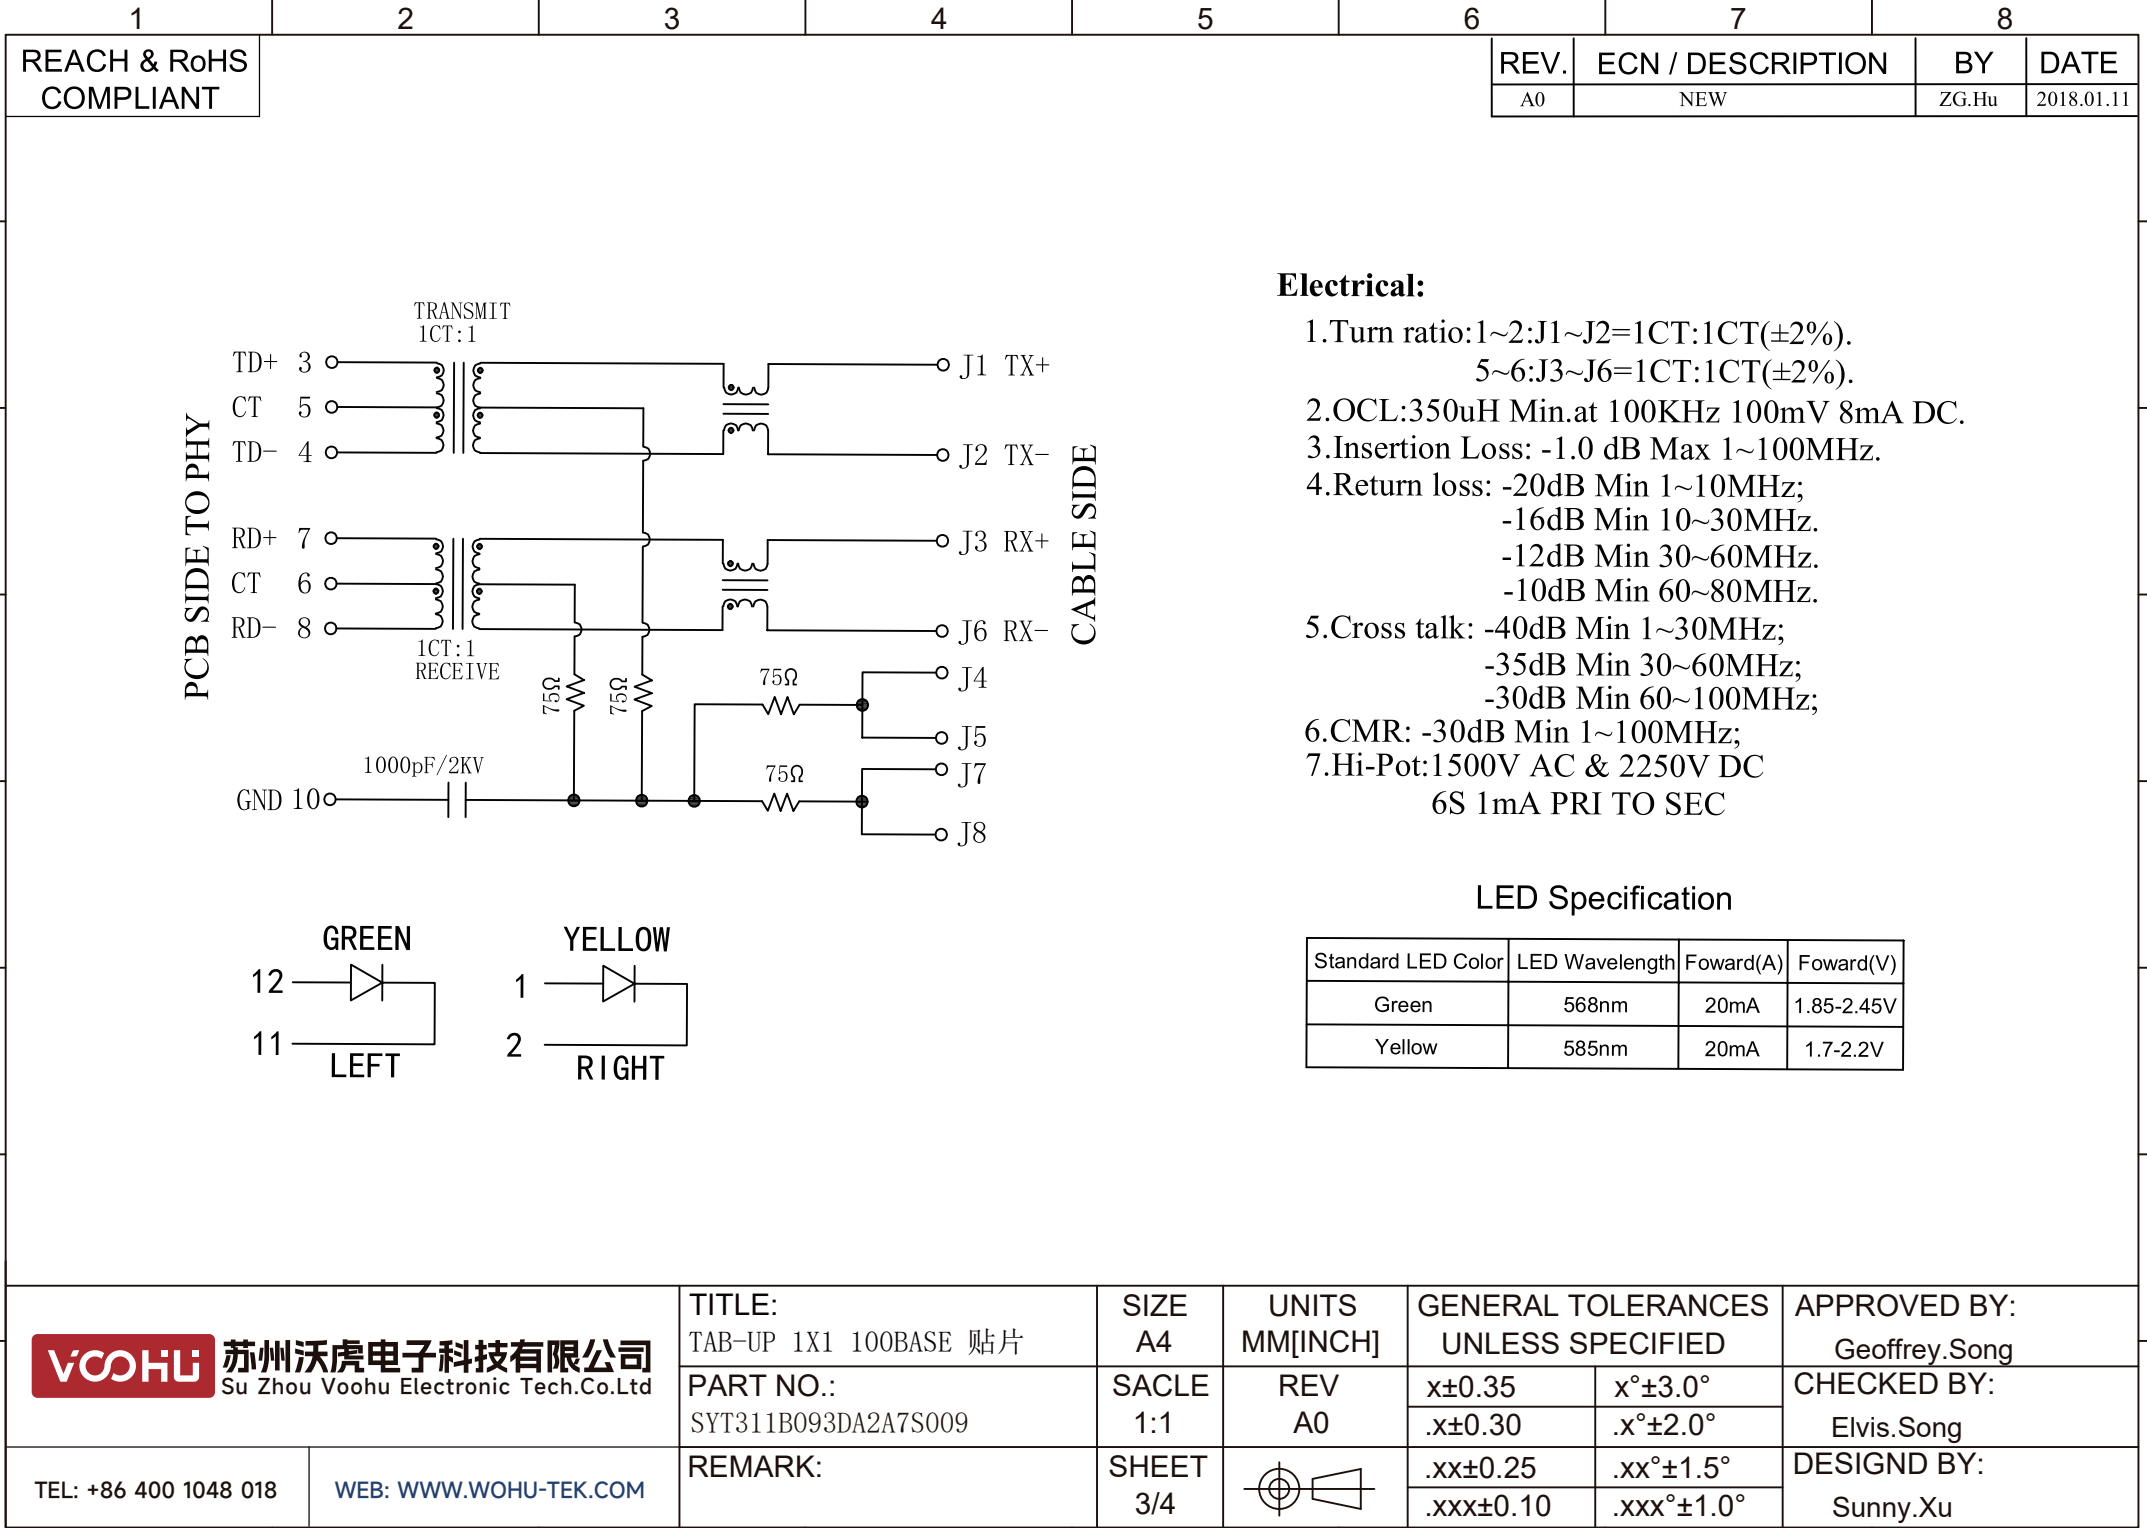

PROFILE OF REFLOW SOLDERING

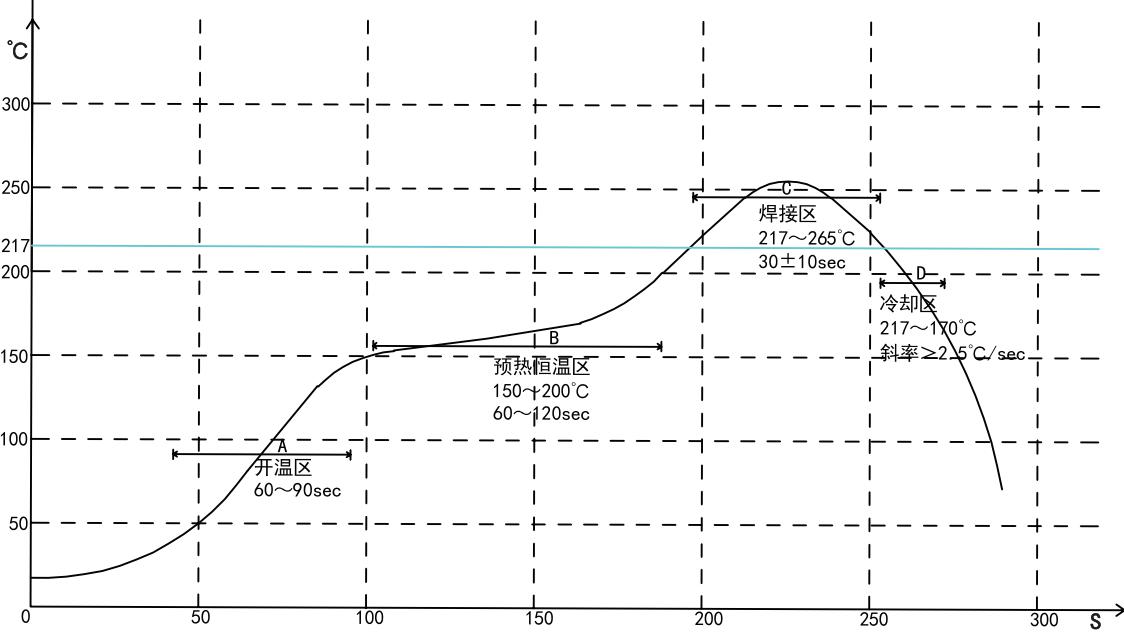

A. Temperature range of open
B. Preheat temperature zone
C. The welding zone
D. The cooling zone
Tip temperature: 265±5°C.
Tip temperature time: 30±10Sec.
Tip melting point of Sn96.5/Ag3/Cu0.5.

A	 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 100BASE 贴片	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
			PART NO.: SYT311B093DA2A7S009	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY:
	TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 4/4		.xx±0.25	.xx°±1.5°	DESIGND BY:
						.xxx±0.10	.xxx°±1.0°	Sunny.Xu