


REACH & RoHS
COMPLIANT

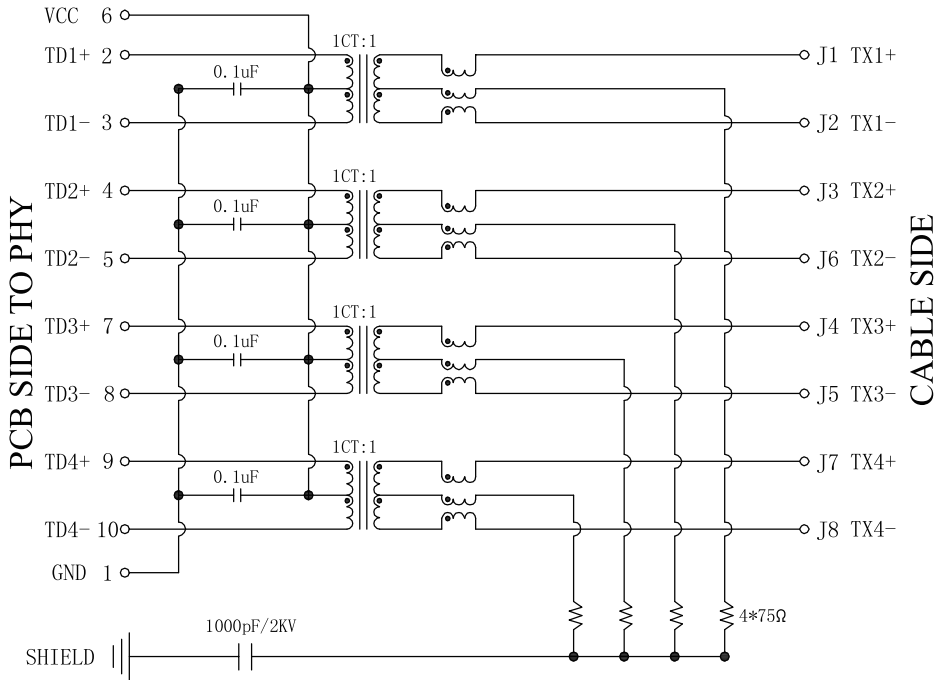


Electrical:

- Turn ratio:2~3:J1~J2=1CT:1CT($\pm 2\%$).
4~5:J3~J6=1CT:1CT($\pm 2\%$).
7~8:J4~J5=1CT:1CT($\pm 2\%$).
9~10:J7~J8=1CT:1CT($\pm 2\%$).
- OCL:350uH Min.at 100KHz 100mV 8mA DC.
- Insertion Loss: -1.0 dB Max 1~100MHz.
- Return loss: -18dB Min 1~30MHz;
-14dB Min 30~60MHz.
-12dB Min 60~80MHz.
-10dB Min 80~100MHz.
- Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- Hi-Pot:2250V DC 6S 1mA PRI TO SEC

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Orange	605nm	20mA	1.8-2.8V

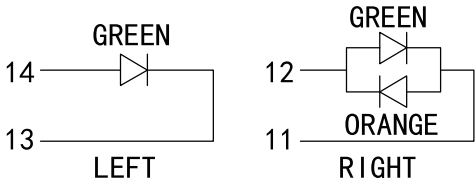

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
TAB-UP 1X1 10/100/1000BASE
PART NO.:
SYT211Q229CE6A4D

REMARK:

SIZE
A4
SACLE
1:1
REV
A0




GENERAL TOLERANCES
UNLESS SPECIFIED
x ± 0.35
.x ± 0.30
.xx ± 0.25
.xxx ± 0.10
x $^{\circ} \pm 3.0^{\circ}$
.x $^{\circ} \pm 2.0^{\circ}$
.xx $^{\circ} \pm 1.5^{\circ}$
.xxx $^{\circ} \pm 1.0^{\circ}$

APPROVED BY:
Geoffrey.Song
CHECKED BY:
Elvis.Song
DESIGND BY:
Sunny.Xu

REACH & RoHS
COMPLIANT

PROFILE OF WAVE SOLDER

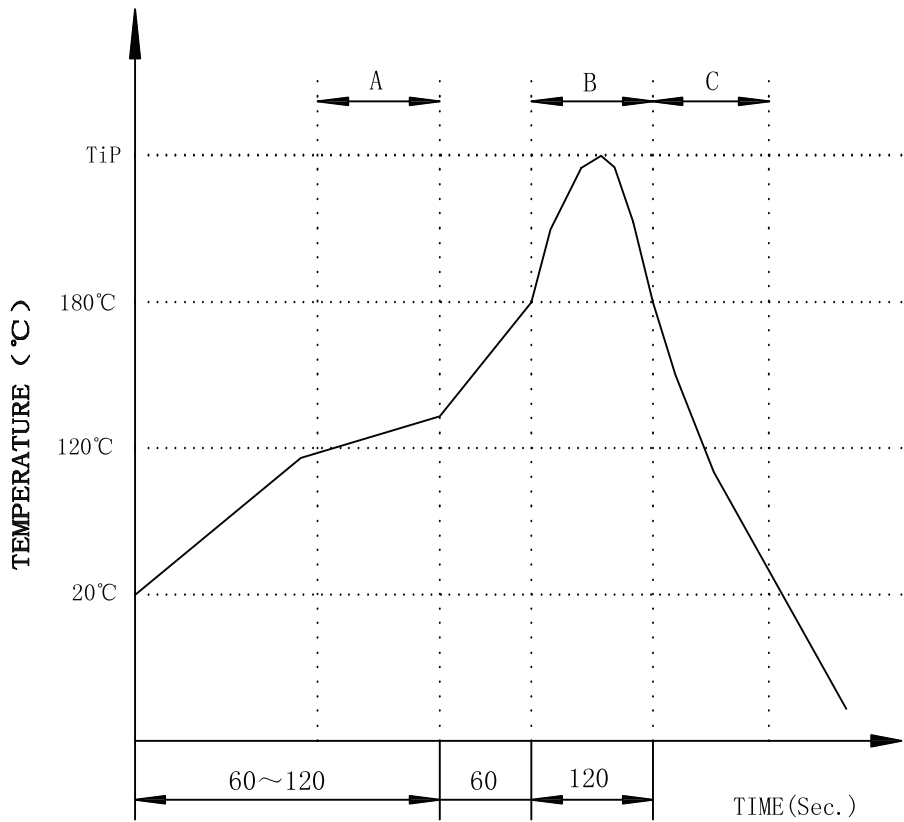

Remarks: after wave soldering, the plastic positioning columns of the product which under the PCB will be slightly melted, but it won't affect its function.

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd


TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
TAB-UP 1X1 10/100/1000BASE
PART NO.:
SYT211Q229CE6A4D

REMARK:

SIZE
A4
SACLE
1:1
SHEET
3/3



UNITS
MM[INCH]
REV
A0
GENERAL TOLERANCES
UNLESS SPECIFIED
x $\pm$ 0.35
x $\pm$ 0.30
xx $\pm$ 0.25
xxx $\pm$ 0.10
x $^{\circ}$ $\pm$ 3.0 $^{\circ}$
x $^{\circ}$ $\pm$ 2.0 $^{\circ}$
xx $^{\circ}$ $\pm$ 1.5 $^{\circ}$
xxx $^{\circ}$ $\pm$ 1.0 $^{\circ}$

APPROVED BY:
Geoffrey.Song
CHECKED BY:
Elvis.Song
DESIGND BY:
Sunny.Xu