




REACH & RoHS
COMPLIANT

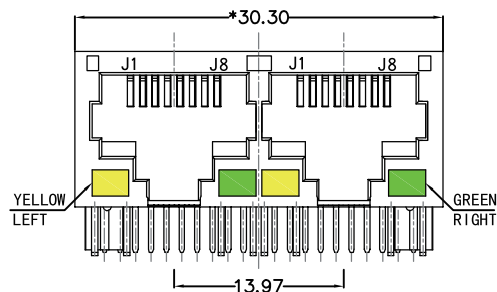


FRONT VIEW



RIGHT SIDE VIEW

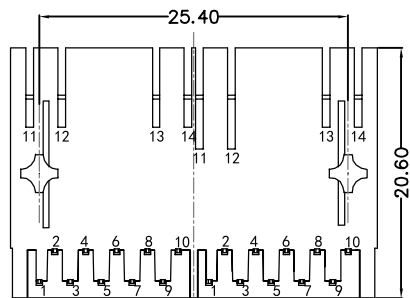

BOTTOM VIEW

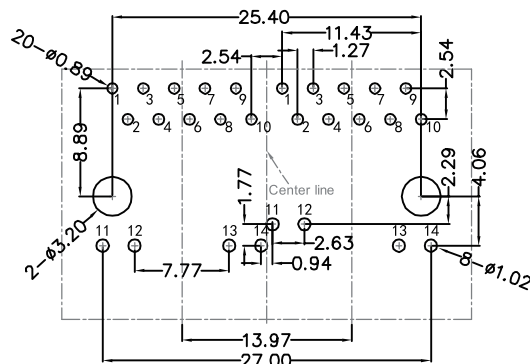

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: PBT,UL94V-0,BLACK.

TERMINALS BRACKET: PBT,UL94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE C5210,T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:

DURABILITY: 750 CYCLES MIN.

MATING FORCE: 23N MAX.

OPERATING TEMPERATURE: -40°C~+85°C.

STORAGE TEMPERATURE: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH "*"

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
TAB-DOWN 1×2 1000BASE

PART NO.:
SYT112Q106JB1A1D

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/3

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$


APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGN BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

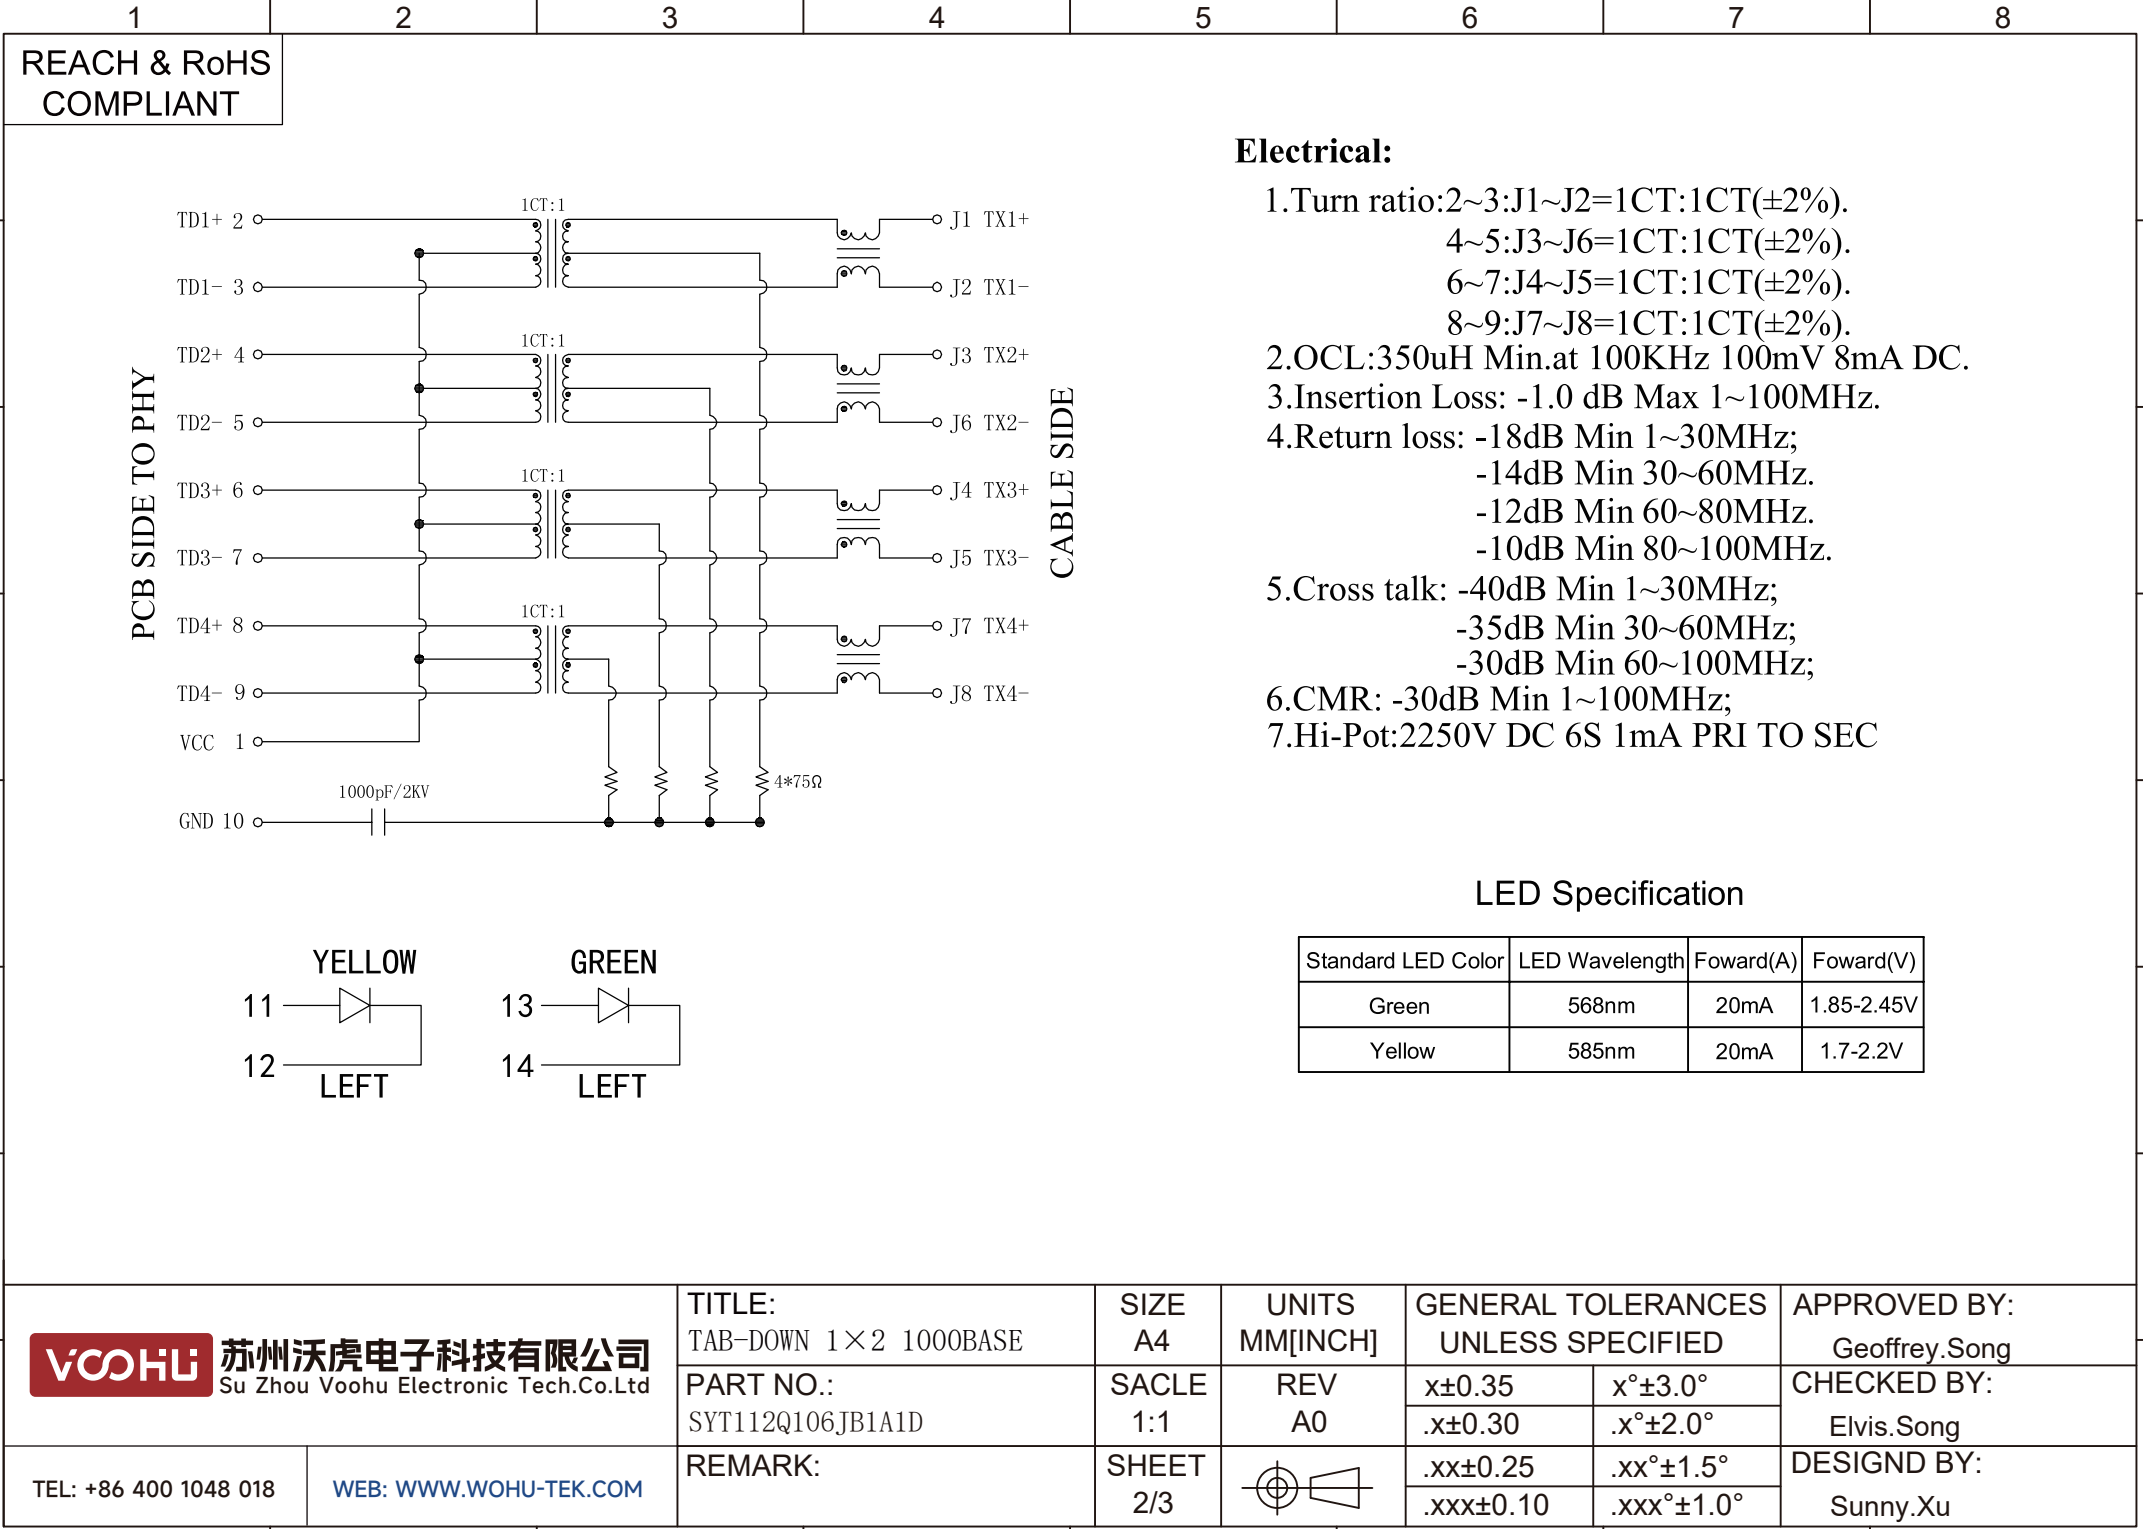

Electrical:

1.Turn ratio:2~3:J1~J2=1CT:1CT(±2%).
4~5:J3~J6=1CT:1CT(±2%).
6~7:J4~J5=1CT:1CT(±2%).
8~9:J7~J8=1CT:1CT(±2%).

2.OCL:350uH Min.at 100KHz 100mV 8mA DC.

3.Insertion Loss: -1.0 dB Max 1~100MHz.

4.Return loss: -18dB Min 1~30MHz;
-14dB Min 30~60MHz.
-12dB Min 60~80MHz.
-10dB Min 80~100MHz.

5.Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;

6.CMR: -30dB Min 1~100MHz;

7.Hi-Pot:2250V DC 6S 1mA PRI TO SEC

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

VOOHU

苏州沃虎电子科技有限公司

Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:

TAB-DOWN 1×2 1000BASE

PART NO.:

SYT112Q106JB1A1D

REMARK:

SIZE

A4

UNITS

MM[INCH]

GENERAL TOLERANCES

UNLESS SPECIFIED

APPROVED BY:

Geoffrey.Song

CHECKED BY:

Elvis.Song

DESIGND BY:

Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

SHEET

2/3

.xx±0.25

.xxx±0.10

x°±3.0°


.x°±2.0°

.xx°±1.5°

.xxx°±1.0°

REACH & RoHS
COMPLIANT

PROFILE OF WAVE SOLDER

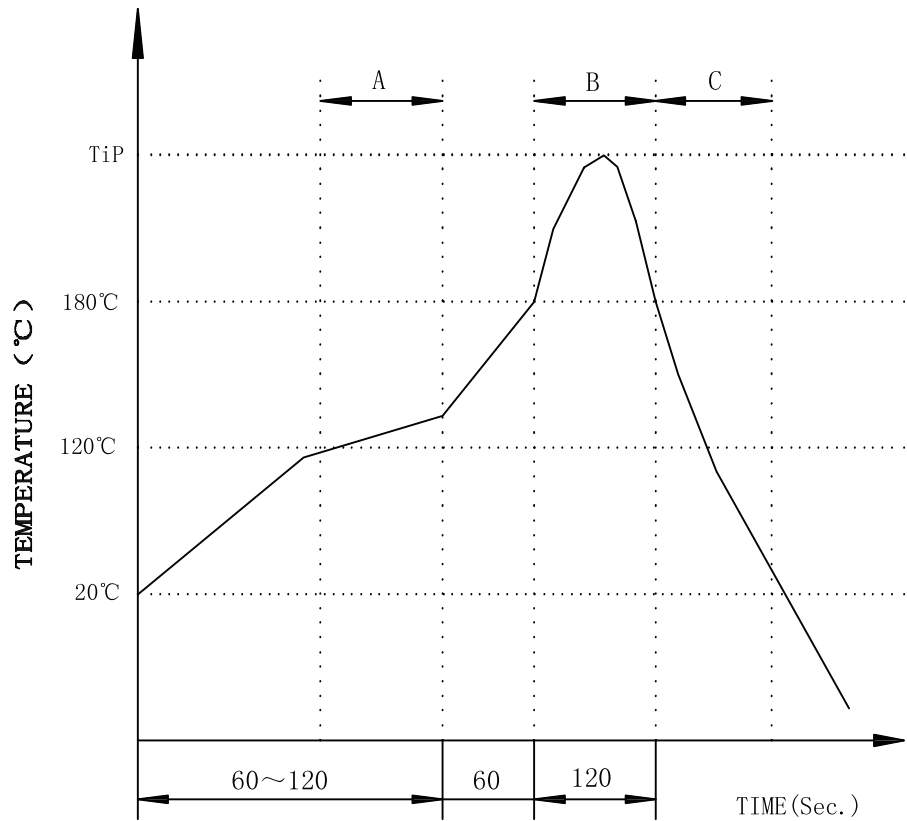

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
TAB-DOWN 1×2 1000BASE

PART NO.:
SYT112Q106JB1A1D

REMARK:


SIZE
A4

SACLE
1:1

SHEET
3/3

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$	$x^{\circ} \pm 3.0^{\circ}$
$.x \pm 0.30$	$.x^{\circ} \pm 2.0^{\circ}$
$.xx \pm 0.25$	$.xx^{\circ} \pm 1.5^{\circ}$
$.xxx \pm 0.10$	$.xxx^{\circ} \pm 1.0^{\circ}$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu