
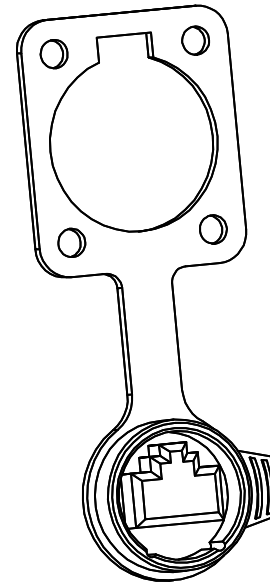
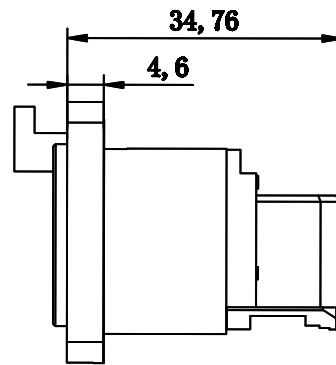



REACH & RoHS
COMPLIANT

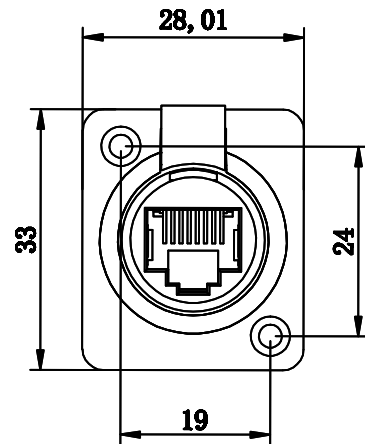



Soft rubber
accessories

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And unmating Force:3~20N
Durability:1000 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

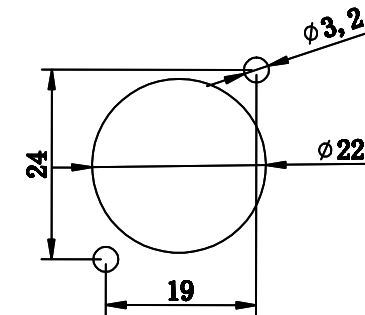

Frontplattenausschnitt (Rueckseite)
Panel cut out (rear side)

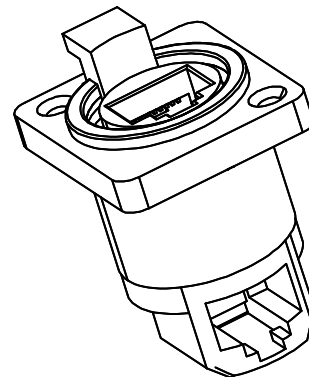

9	Straight through core	PHOSPHOR BRONZE(0.3*64)	1	LCP/No coating	
8	Silicone dust cover	silica gel(50%)	1	/	
7	Soft rubber inner pad	silica gel(50%)	1	BLACK	
6	Press handle	stainless steel	1	NI	
5	Shrapnel	manganese steel	1	NI	
4	back covert	PA66	1	BLACK	
3	Metal panel	kirsite	1	BLACK	
2	PIN INSERTION	PHOSPHOR BRONZE	8	1U"	
1	PLASTIC BASE	PA66	1	BLACK	
SERIAL NUMBER	NAME	MATERIALS	QUANTITY	COATING/ COLOUR	NOTES

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
63 90°

PART NO.:
WH639080001051AB33

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35
.x±0.30
.xx±0.25
.xxx±0.10

x°±3.0°
.x°±2.0°
.xx°±1.5°
.xxx°±1.0°

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM