

Specification for Approval

产品承认书

Customer:

Customer P/N:

VOOHU P/N:

WHAL-4520A-Series

Version No.:

V0.1

Description:

Automotive Power Line Choke

SUZHOU VOOHU Company Approval		Customer Approval (客户承认签章)
DRAWN	Geoffrey.Song	
CHECKED	Sunny.Xu	
APPROVED	Elvis. Song	
日期DATE:2025/5/23		日期DATE: 2025/5/23

Please Return One Copy to Us After Approved,TKs! (承认后请回寄一份,谢谢)

VOOHU 沃虎
造沃虎·真靠谱

苏州沃虎电子科技有限公司
SuZhou Voohu Electronic Tech.Co.,Ltd

地址：江苏省苏州市吴江区开平商务中心G栋13楼
ADD: Building A, Alpha Building, Wujiang District,
Suzhou City, Jiangsu Province

TEL: 400 1048 018
+86 13338655578

WEB: www.wohu-tek.com/
E-MAIL: wohu@wohu-tek.com

1 Features And Benefits


- Wire wound constructure common mode choke with best EMI suppression effect high impedance but very high rated current and low DCR
- Preventive measure against common mode noise radiation emissions from power line or else.
- Best for high current circuit such as car, wireless charging and power devicedesign.
- RoHS Compliant
- Operating Temperature: -40℃ to +125℃
- Compatible with RoHS Directive and AEC-Q200



2 Electrical Specifications @ 25℃



Part Number	Common Mode Impedance (100MHZ)		DCR (mΩ)Max	Rated Current (A)	Insulation Resistance (MΩ) Min	Rated Voltage (V) Max
	(Ω) Min	(Ω) Typ				
WHAL-4520A-900T0	60	90	35	3.2	10	50
WHAL-4520A-151T0	90	150	40	3.2	10	50
WHAL-4520A-231T0	180	230	45	3.0	10	50
WHAL-4520A-301T0	200	300	45	3.0	10	50
WHAL-4520A-381T0	250	380	50	2.5	10	50
WHAL-4520A-401T0	300	420	50	2.5	10	50
WHAL-4520A-501T0	350	500	55	2.4	10	50
WHAL-4520A-701T0	500	700	58	2.2	10	50
WHAL-4520A-901T0	650	900	60	2.1	10	50
WHAL-4520A-102T0	800	1000	60	2.1	10	50
WHAL-4520A-122T0	1000	1200	70	2.0	10	50
WHAL-4520A-142T0	1200	1400	80	1.9	10	50
WHAL-4520A-202T0	1800	2000	80	1.5	10	50
WHAL-4520A-302T0	2500	3000	80	1.0	10	50

3 Dimensions (mm)

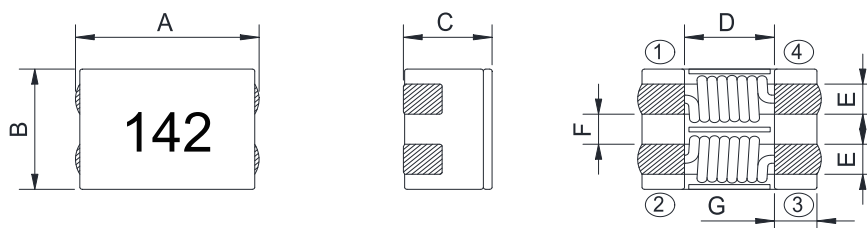


Item	A	B0	C	D	E	F	G
Dim	4.7	4.5	2.5	2.7	0.9	1.0	1.0
Tole	±0.5	±0.5	Max	Typ	Typ	Typ	Typ

4 Schematics& recommend layout

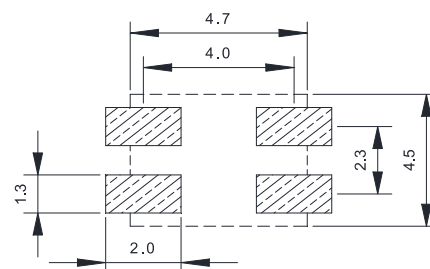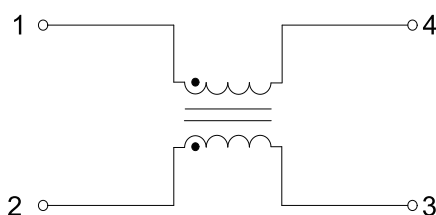


DESCRIPTION	PART NO.	REV:R0
Automotive Power Line Choke	WHAL-4520A-Series	PAGE:1/6

5 Impedance VS. Frequency


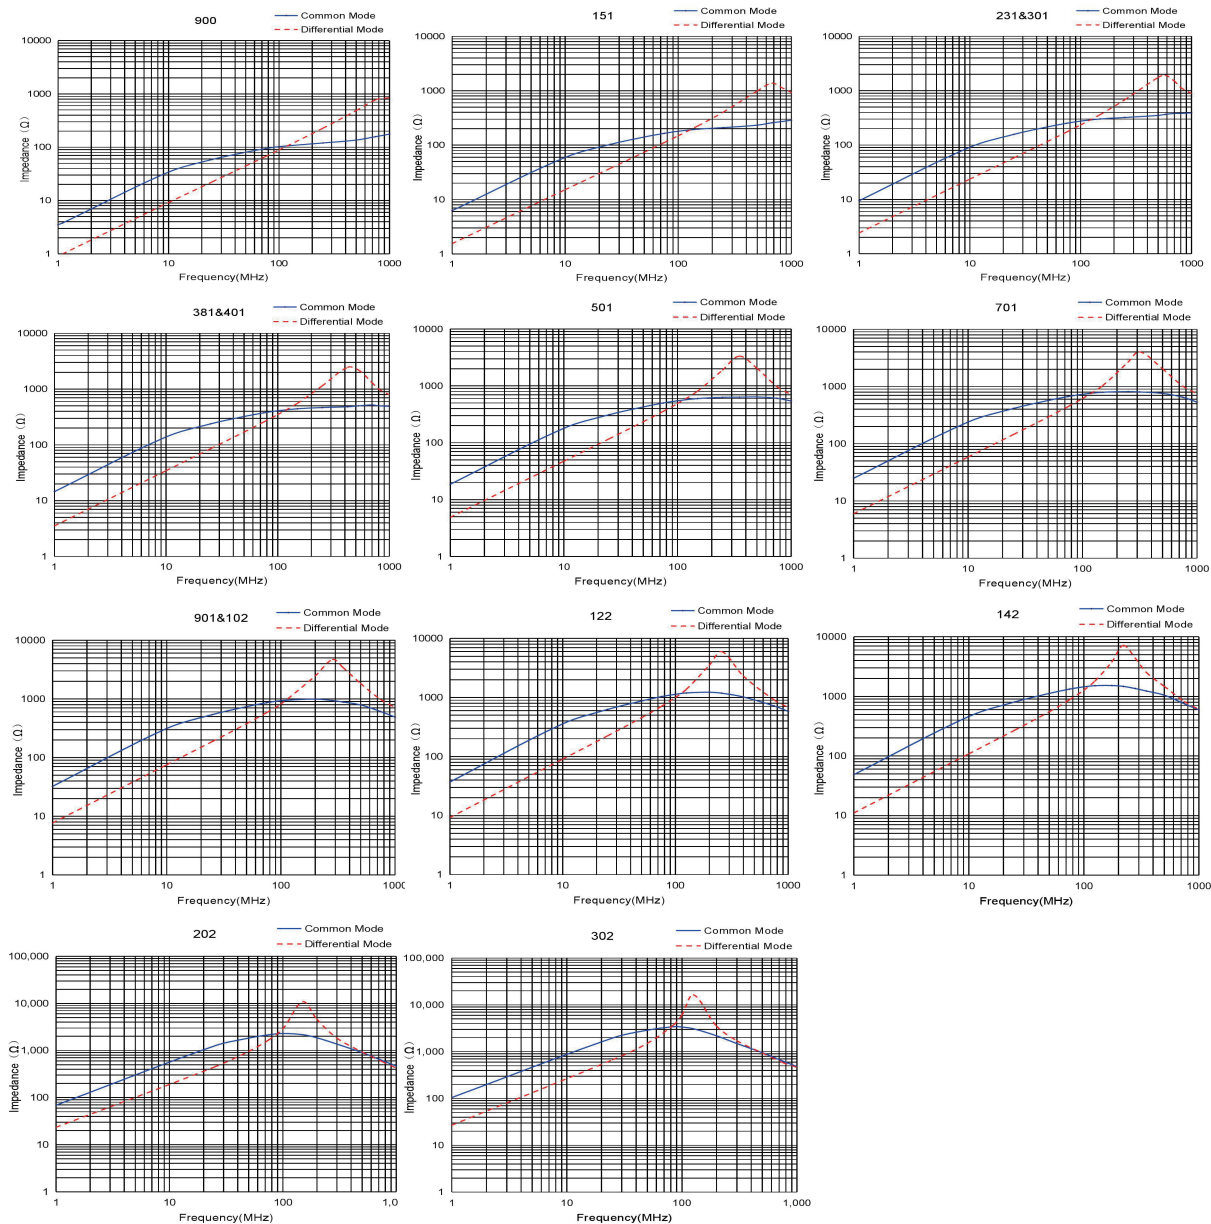


6 Recommended Reflow Profile

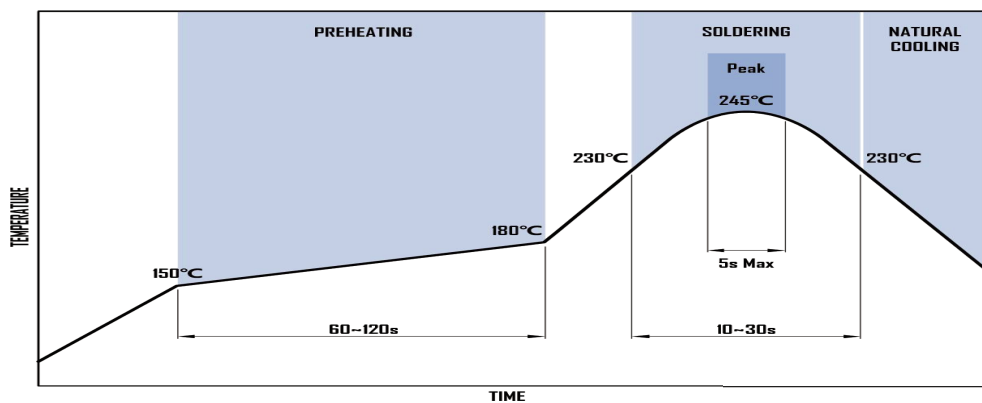

DESCRIPTION	PART NO.	REV:R0
Automotive Power Line Choke	WHAL-4520A-Series	PAGE:2/6

7 Packaging specification

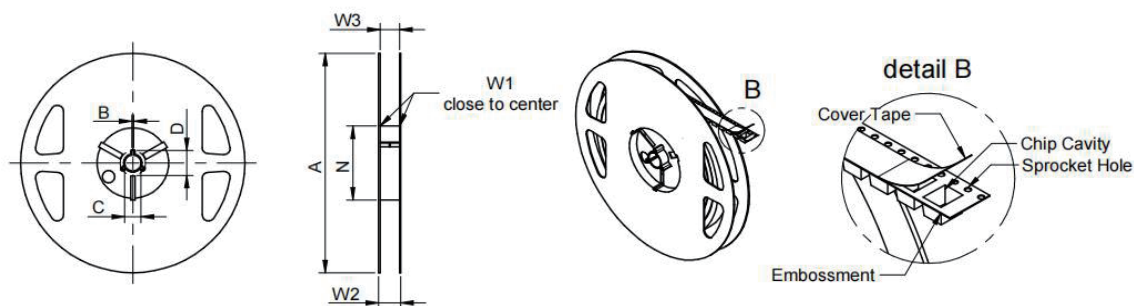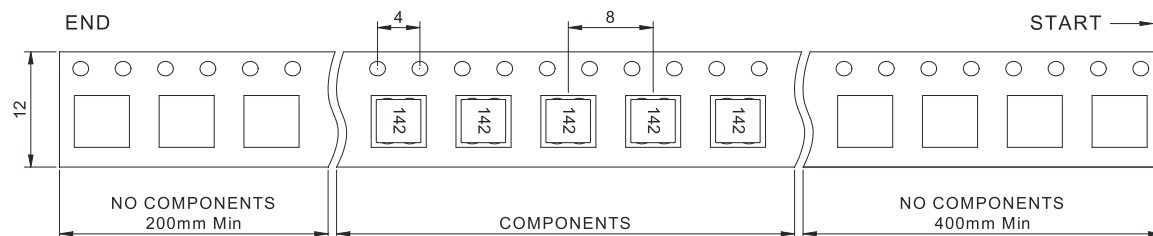

NO.	A	B	C	D	N	W1	W2	W3	W3	
Value	178	1.5	12.8	20.2	60	12.4	18.4	11.9	15.4	
Tolerance	±2.0	Min	Min	Min	Min	±2.0	Max	Min	Max	

Product Series	Quantity / Reel	Inner Carton Quantity	Out Carton Quantity
WHAL-4520A	1000pcs	(1000x8) = 8000pcs	(8000x3) = 24000pcs

■ Inner Carton: 340x340x70mm

■ Out Carton: 360x360x240mm

DESCRIPTION	PART NO.	REV:R0
Automotive Power Line Choke	WHAL-4520A-Series	PAGE: 3/6

8 Reliability test

NO.	Test Item	Standard Reference	Test Condition
1	High temperature storage test	MIL-STD-202 Method 108	1、1000 hrs. at rated temperature (e.g. 85°C part can be stored for 1000 hrs. at 85°C. Same applies for 125°C part. Unpowered. 2、Remeasure the parameters at 250hrs & 500hrs in addition to measuring them 3、Measurement at 24±4 hours after test conclusion.
2	Temperature Cycling	JESD22 Method JA-104	1、1000 cycles (-40°C to +125°C). Note: If 85°C part or 105°C part the 1000 cycles will be at that temperature. 2、Soc Time : 30min 3、Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme. 1 min. maximum transition time.
3	Biased Humidity	MIL-STD-202 Method 103	1、Time: 1000 hours, Temperature: 85±2°C / humidity:85±2%RH 2、Measurement at 24±4 hours after test conclusion.
4	Operational Life	MIL-STD-202 Method 108	1、1000 hrs. @ 105°C. If 85°C or 125°C part will be tested at that temperature. (Refer to DS) 2、Remeasure the parameters at 250hrs & 500hrs in addition to measuring them at the end of the test. 3、Measurement at 24±4 hours after test conclusion.
5	Resistance to Solvents	MIL-STD-202 Method 215	1、It is applicable to marked and/or coated components. 2、Add Aqueous wash chemical OKEMCLEAN (A 6% concentrated Oakite cleaner) or equivalent. Notes: Do not use banned solvents.
6	Mechanical Shock	MIL-STD-202 Method 213	1、Figure 1 of Method 213. Condition C : Peak value:100g's; Normal duration(D):6ms; Waveform:Half-sine; Velocity change(Vi)ft/sec:12.3 2、18 cycles each of 6 orientations at 1500g's
7	Vibration	MIL-STD-202 Method 204	5g's for 20 min., 12 cycles each of 3 orientations Note: Use 8"x5" PCB .031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.(12 cycles each of 3 orientations at 5g's/ 0.5" / 10-2000 Hz.)
8	Resistance to Soldering Heat	MIL-STD-202 Method 210	Condition B No pre-heat of samples. Note: Single Wave Solder -Procedure 2 for SMD and Procedure 1 for Leaded with solder within 1.5mm of device body. Condition B include the follow conditions: 1.Temperature(°C): 260±5 (solder temp) ; 2.Time(s):10±1; 3.Temperature ramp/immersion and emersion rate:25mm/s±6mm/s;

DESCRIPTION	PART NO.	REV:RO
Automotive Power Line Choke	WHAL-4520A-Series	PAGE:4/6

9	Solderability	J-STD-002	1、 For both Leaded & SMD. Electrical Test not required. Magnification 50 X. Conditions: Leaded: Method A @ 235°C. SMD: a) Method B, 4 hrs @155°C dry heat @235°C b) Method B @ 215°C category 3(8 hrs steam). c) Method D category 3(8 hrs steam). @ 260°C.
10	Electrical Characterization	User Spec	1、 Parametrically test per lot and sample size requirements, summary to show Min,Max, Mean and Standard deviation at room as well as Min and Max operating temperatures. a) High Temp. TR at 125°C (Refer to DS) b) Room Temp. TR at 25°C c) Low Temp. TR at -40°C
11	Flammability	UL-94	V-0 or V-1 Acceptable. Test is applicable to components having a resin case.
12	Board Flex	AEC-Q200-005	Required for MLCCs only. 60 sec minimum holding time.
13	Terminal Strength(SMD)	AEC-Q200-006	1、 Unless otherwise specified, the SMD shall be tested while mounted onto a .062 inch thick FR-4 PCB using 1 ounce of Copper. 2、 Apply a 17.7 N (1.8 Kg) force to the side of a device being tested. This force shall be applied for 60 +1 seconds.
14	External Visual	MIL-STD-883 Method 2009	Inspect device construction, marking and workmanship. Electrical Test not required.
15	Physical Dimension	JESD22 Method JB-100	Verify physical dimensions to the applicable device specification. Note: User(s) and Suppliers spec, electrical Test not required.

DESCRIPTION	PART NO.	REV:RO
Automotive Power Line Choke	WHAL-4520A-Series	PAGE:5/6

REMINDERS

- The best assembly quality guarantee period of product: 12 months (From shipment date)
Storage condition : seal in packaging, (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).
- If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of electrodes and affect soldering status.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Always handle products with care to avoid damage.
- Do not touch electrodes with bare hands directly, as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.

DESCRIPTION	PART NO.	REV: R0
Automotive Power Line Choke	WHAL-4520A-Series	PAGE: 6/6