




1. LOW LEVEL CONTACT RESISTANCE(LLCR):
ΔR 10 MILLIOHMS MAXIMUM FOR SHIELD AND SIGNAL CONTACTS.
2. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/MAX.
3. INSULATION RESISTANCE: 1x10⁹/ OHMS MINIMUM.
4. RATINGS CURRENT: 0.5 AMPS MAX.
5. RATINGS VOLTAGE: 30 VOLTS DC/AC(RMS) MAX.
6. OPERATION: -40° C~+85° C.
7. STORAGE: -55° C~+105° C.
8. ROHS COMPLIANT




VCOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

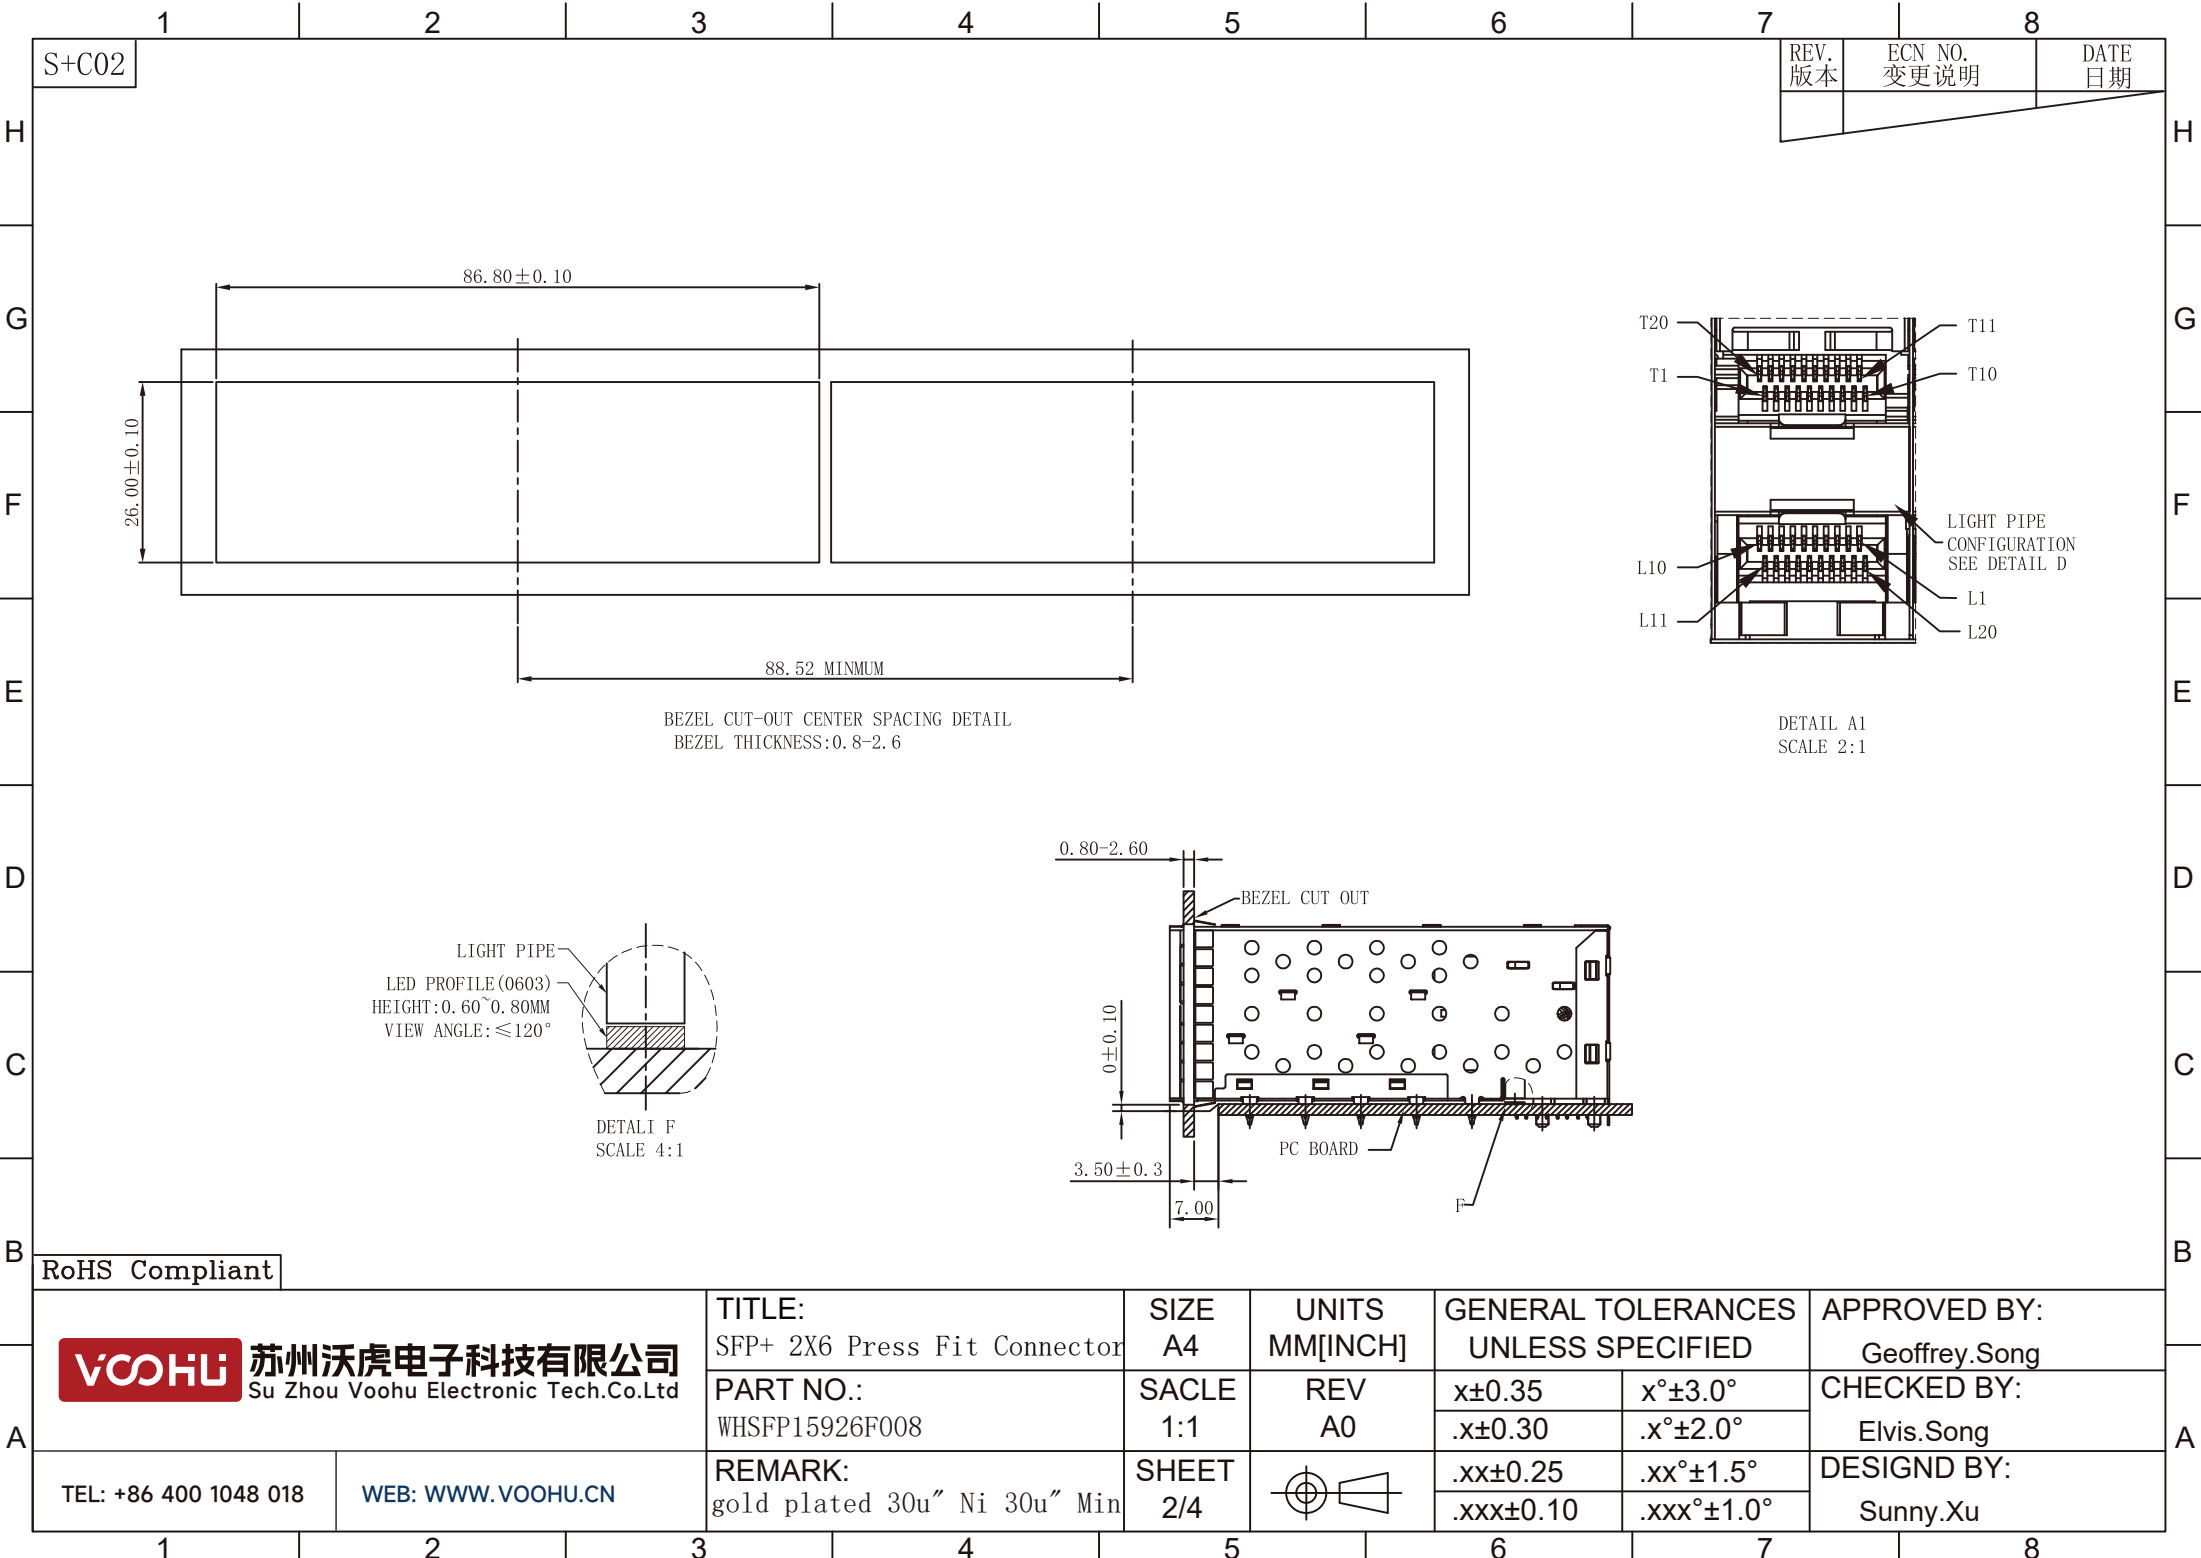

S+C02



REV. 版本	ECN NO. 变更说明	DATE 日期

RoHS Compliant

A	 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: SFP+ 2X6 Press Fit Connector		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: WHSFP15926F008		SACLE 1:1	REV A0	.xx±0.25	.xx°±3.0°	CHECKED BY:	
	TEL: +86 400 1048 018 WEB: WWW.VOOHU.CN		REMARK: gold plated 30u" Ni 30u" Min		SHEET 2/4		.x±0.35	.x°±2.0°	DESIGND BY: Sunny.Xu	
							.xxx±0.10	.xxx°±1.0°		

S+C02

REV. 版本	ECN NO. 变更说明	DATE 日期

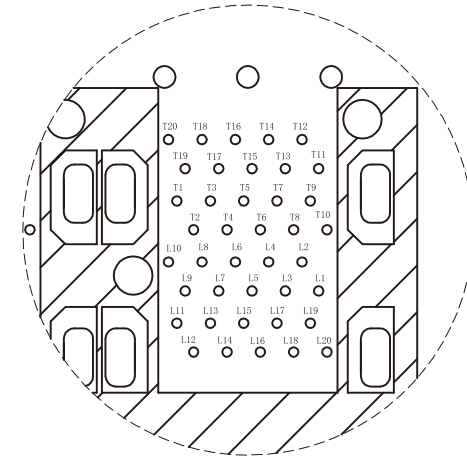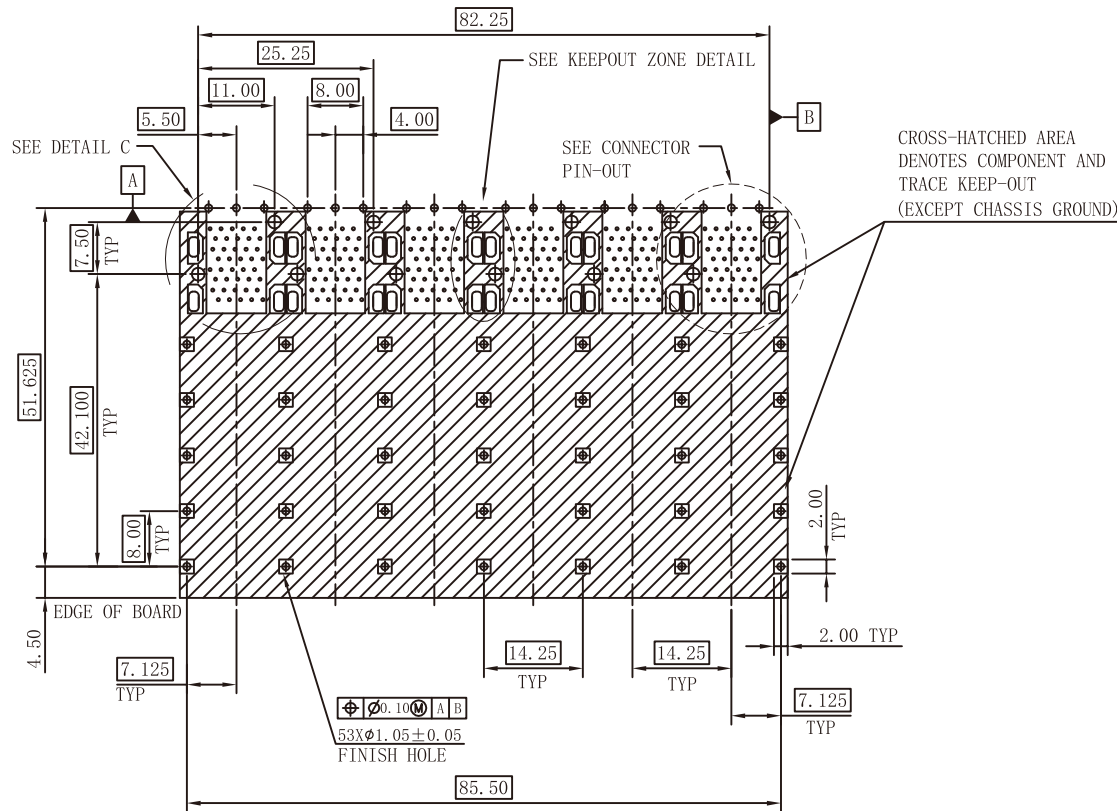

CONNECTOR PIN-OUT
COMPONENT SIDE OF BOARD

RECOMMENDED PCB LAYOUT-COMPONENT SIDE
RECOMMENDED PCB THICKNESS-2.63 MM

THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT
TO BE CONSIDERED THE KEEP OUT AREA FOR COMPONENTS
(OTHER THAN LIGHT PIPE LED'S)
THIS AREA IS INDICATED BY THE DASHED LINE

RoHS Compliant

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.VOOHU.CN

TITLE:
SFP+ 2X6 Press Fit Connector

PART NO.:
WHSFP15926F008

REMARK:
gold plated 30u" Ni 30u" Min


SIZE
A4

SACLE
1:1

SHEET
3/4

UNITS
MM[INCH]

REV
A0




GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

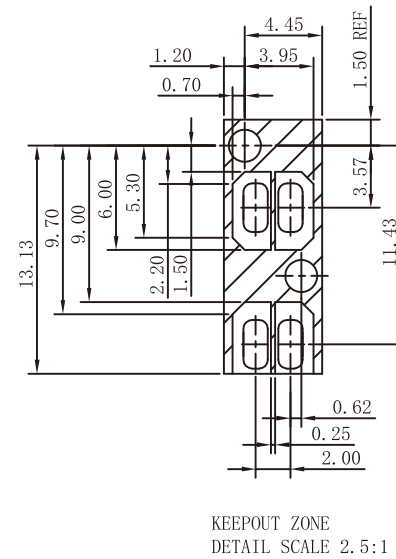

DESIGND BY:
Sunny.Xu