
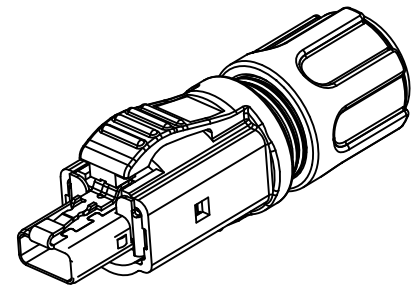


1
2
3
4
5
6
7
8

REACH & RoHS
COMPLIANT

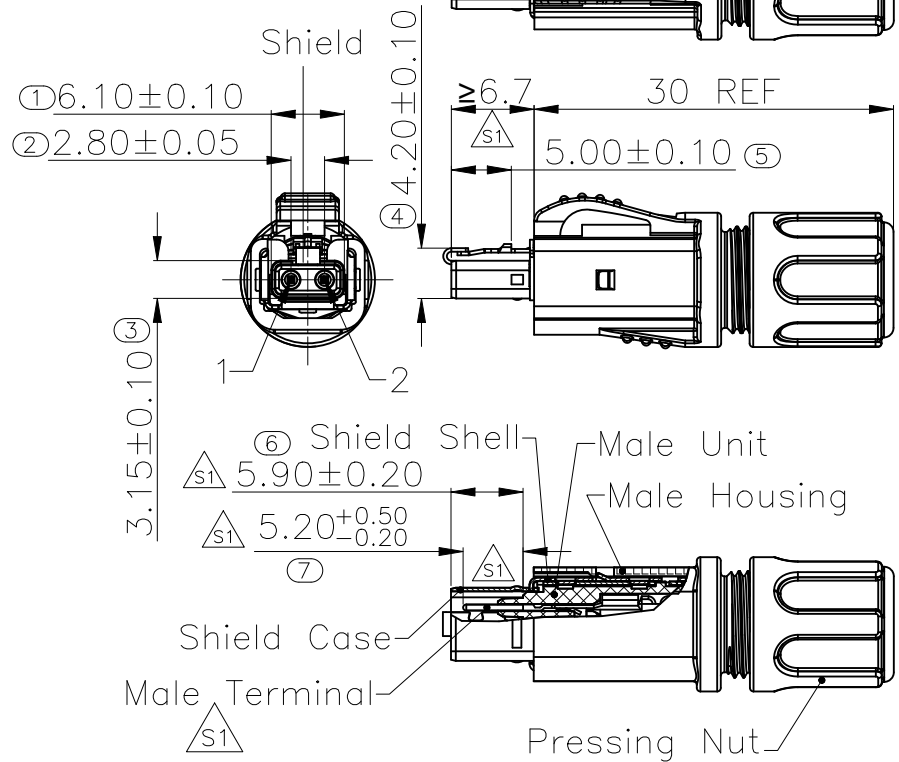

Detailed Product Description:
Waterproof Connector Rating Is IP20
Electrical Character
Rating Voltage: 60V DC
Insulation Resistance: >500M ohms
Rating Current: 4A
Contact Resistance: ≤20m ohms
Shielding Resistance: ≤100m ohms
Other Specification
Cable Diameter: See Table
Operating Temperature: -25°C ~ +85°C
Durability: 1000 Mating Cycles Min.
*All Materials Are RoHS Compliant.

⑦	NU00207	Pressing Screw, PPS ,Color Black, UL94HB	1	PCS
⑥	SEE TABLE	O-Ring ,NBR,Color:Pantone Black,70A(5.6*ø8.1mm)	1	PCS
⑤	TK00188	Shield Shell, Stainless Steel, Tin Plated 5um MIN	1	PCS
④	TK00187	Shield Case, Stainless Steel, Tin Plated 5um MIN	1	PCS
③	TE01501	Male Terminal,Phosphor Bronze, Gold Plated Over Tin On Terminal Area	2	PCS
②	WK00898	Male Housing, PPS ,Color Black, UL94HB	1	PCS
①	CN01472	Plug Unit, PA ,Color Black, UL94HB	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

TITLE: SPE 2PIN PLUG CONNECTOR (CRIMP TYPE)	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
			x±0.35	x°±3.0°	
			.x±0.30	.x°±2.0°	
			.xx±0.25	.xx°±1.5°	
PART NO.: WHSPE00468	SCALE 1:1	REV A0	.xxx±0.10	.xxx°±1.0°	CHECKED BY: Elvis.Song
REMARK:	SHEET 1/1				DESIGNED BY: Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018 WEB: WWW.VOOHU.CN