


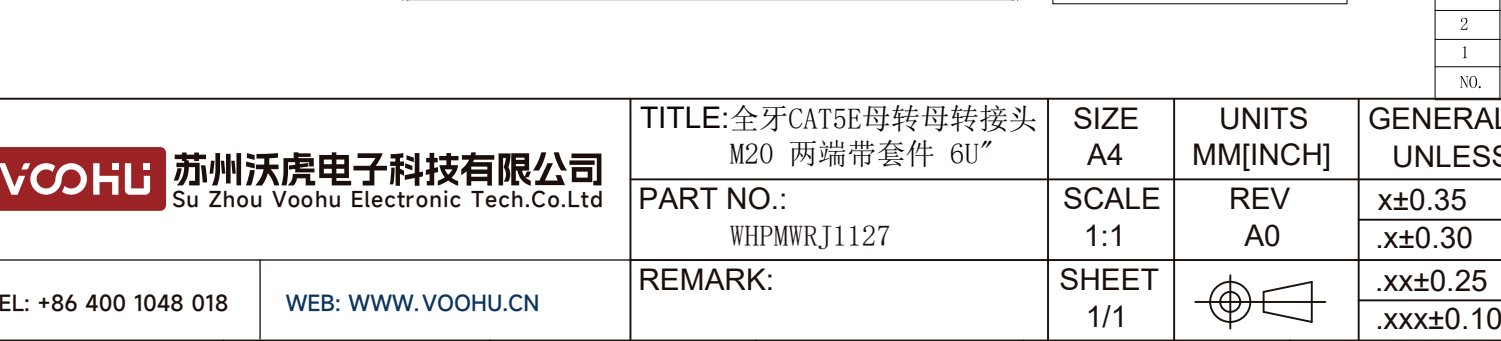

- | | | |
|--------|--|------|
| tor | 8P8C 6U" | PCS |
| ut | Black PA66 | PCS |
| D) | Red Silicone Cable OD Range Ø7~Ø5.5 | PCS |
| | Black PA66 | PCS |
| | Silicone Black | PCS |
| R Body | Black RJ45 外PA66 /内PBT | PCS |
| UTLE | STANDARD | UNIT |
- | | |
|---|---|
| TOLERANCES
SPECIFIED
$\pm 3.0^{\circ}$
$\pm 2.0^{\circ}$
$\pm 1.5^{\circ}$
$\pm 1.0^{\circ}$ | APPROVED BY:
Geoffrey.Song |
| | CHECKED BY:
Elvis.Song |
| | DESIGNED BY:
Sunny.Xu |
| | |

GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
0.35	$x^{\circ} \pm 3.0^{\circ}$	CHECKED BY: Elvis.Song
0.30	$.x^{\circ} \pm 2.0^{\circ}$	
± 0.25	$.xx^{\circ} \pm 1.5^{\circ}$	DESIGNED BY:
± 0.10	$.xxx^{\circ} \pm 1.0^{\circ}$	Sunny.Xu

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---