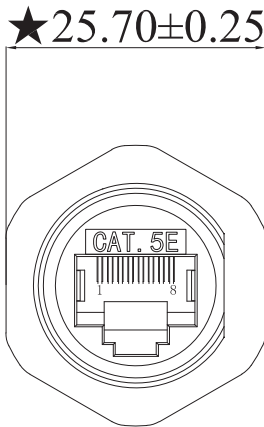
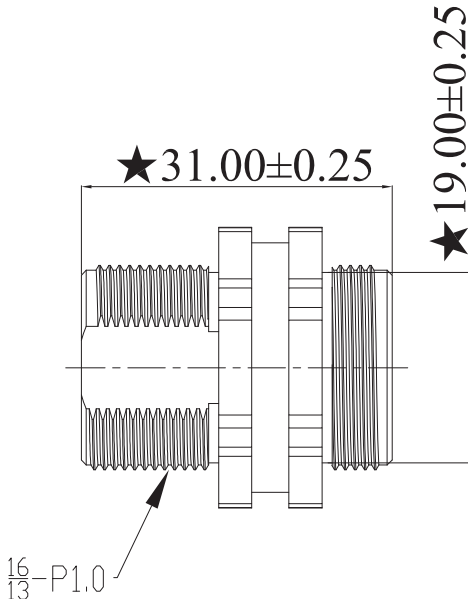





1	2	3	4	5	6	7	8																				
REACH & RoHS COMPLIANT																											
																											
				WIRE DIAGRAM <table><tr><th>P1</th><th>P2</th></tr><tr><td>1</td><td>1</td></tr><tr><td>2</td><td>2</td></tr><tr><td>3</td><td>3</td></tr><tr><td>4</td><td>4</td></tr><tr><td>5</td><td>5</td></tr><tr><td>6</td><td>6</td></tr><tr><td>7</td><td>7</td></tr><tr><td>8</td><td>8</td></tr><tr><td>S</td><td>S</td></tr></table>				P1	P2	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	S	S
P1	P2																										
1	1																										
2	2																										
3	3																										
4	4																										
5	5																										
6	6																										
7	7																										
8	8																										
S	S																										
NOTES 1. 100%Test (Open , short ,miss wire). 2. Contact Resistance: 5 ohm max. 3. Insulation Resistance: 10M ohm min. 4. voltage:300V DC/10ms. 5. STORAGE: -40℃ TO +85℃ RELATIVE HUMIDITY<80%. 6. OPERATION: -40℃ TO +85℃. 7. Appearance: Free from discoloration, scratches, and other abnormalities. 8. The mark with ★ is the key inspection dimension for QC.																											
				<table><tr><td>2</td><td>连接器</td><td>8P8C 6U"</td><td>pcs</td><td>1</td></tr><tr><td>1</td><td>主体</td><td>全牙 主体 PA66 黑色 94V-0</td><td>pcs</td><td>1</td></tr><tr><td>NO.</td><td>TITLE</td><td>STANDARD</td><td>UNIT</td><td>QTY</td></tr></table>		2	连接器	8P8C 6U"	pcs	1	1	主体	全牙 主体 PA66 黑色 94V-0	pcs	1	NO.	TITLE	STANDARD	UNIT	QTY							
2	连接器	8P8C 6U"	pcs	1																							
1	主体	全牙 主体 PA66 黑色 94V-0	pcs	1																							
NO.	TITLE	STANDARD	UNIT	QTY																							
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: M20全牙 RJ45母转母转接头 PART NO.: WHPMWRJ1065 REMARK: 8P8C 180度 CAT. 5E		SIZE A4 SCALE 1:1 SHEET 1/1		UNITS MM[INCH] REV A0 		GENERAL TOLERANCES UNLESS SPECIFIED <table><tr><td>x±0.35</td><td>x°±3.0°</td></tr><tr><td>.x±0.30</td><td>.x°±2.0°</td></tr><tr><td>.xx±0.25</td><td>.xx°±1.5°</td></tr><tr><td>.xxx±0.10</td><td>.xxx°±1.0°</td></tr></table>		x±0.35	x°±3.0°	.x±0.30	.x°±2.0°	.xx±0.25	.xx°±1.5°	.xxx±0.10	.xxx°±1.0°	APPROVED BY: Geoffrey.Song CHECKED BY: Elvis.Song DESIGNED BY: Sunny.Xu									
x±0.35	x°±3.0°																										
.x±0.30	.x°±2.0°																										
.xx±0.25	.xx°±1.5°																										
.xxx±0.10	.xxx°±1.0°																										
1	2	3	4	5	6	7	8																				