



A. MECHANICAL(unit:mm)

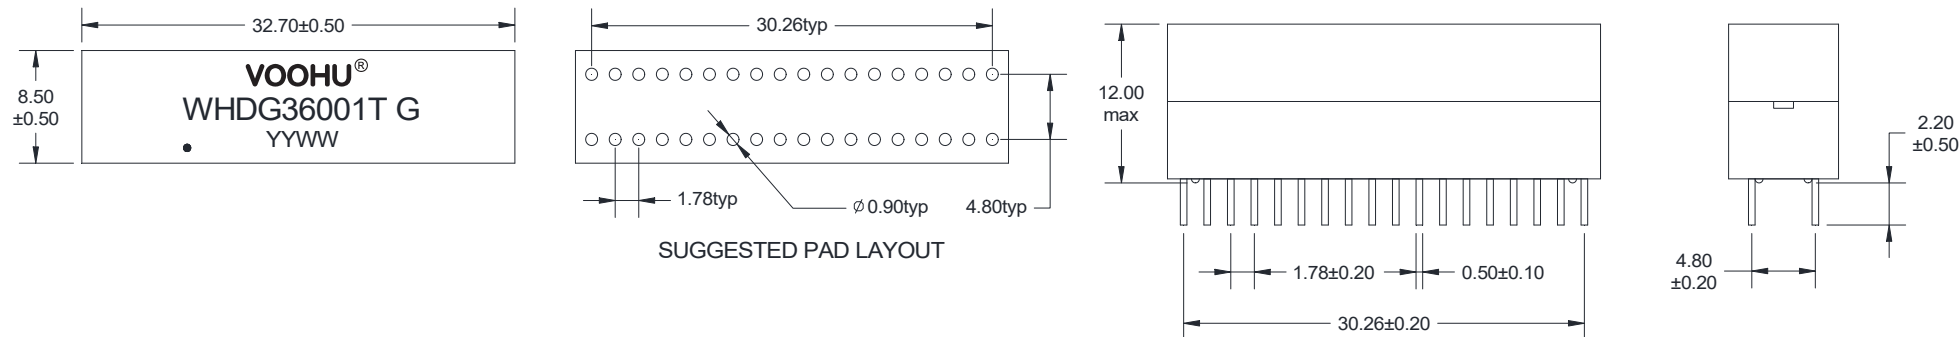

B. SCHEMATICS

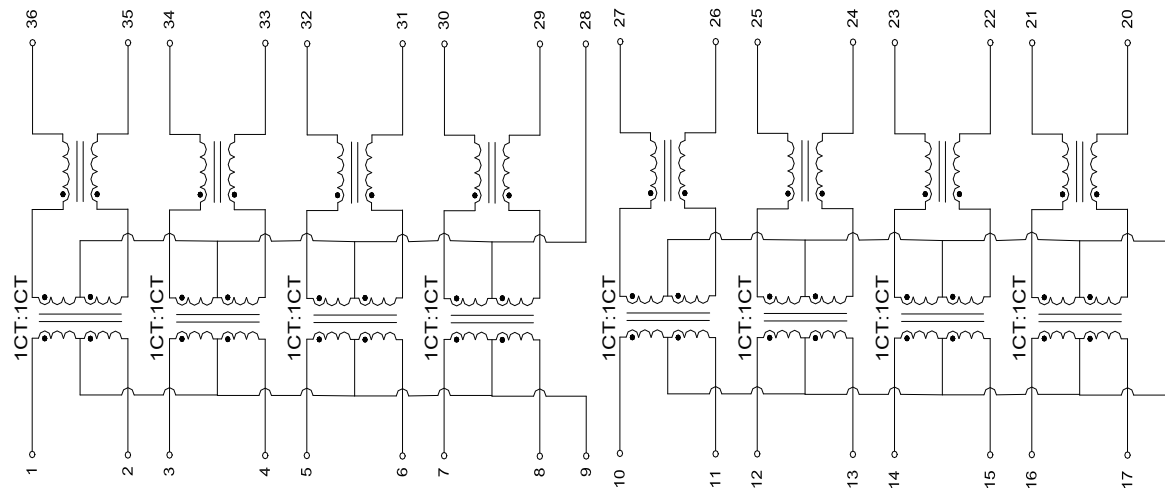

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
100/1000 BASE-T

PART NO.:
WHDG36001T G

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/2

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$	$x^\circ \pm 3.0^\circ$
$.x \pm 0.30$	$.x^\circ \pm 2.0^\circ$
$.xx \pm 0.25$	$.xx^\circ \pm 1.5^\circ$
$.xxx \pm 0.10$	$.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song


CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

C. ELECTRICAL SPECIFICATIONS @25℃


D. PACKAGE INFORMATION

- 1. OCL: 350 uH Min @ 100 KHz, 0.1V with 8mA DC BIAS
- 2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
- 3. DCR: 1400mΩ Max
- 4. Turns Ratio: 1CT:1CT±5%
- 5. Insertion Loss: -1.1 dB Max @ 1-100 MHz
- 6. Return Loss: -18 dB Min @ 1-30 MHz
 - 14.4 dB Min @ 40 MHz
 - 13.1 dB Min @ 50 MHz
 - 12 dB Min @ 60-80 MHz
 - 10 dB Min @ 100 MHz
- 7. Cross Talk: -30 dB Min @ 1-100 MHz
- 8. Common Mode Rejection: -30 dB Min @ 1-100 MHz
- 9. Isolation Hipot: 1500VAC 1mA 60S
- 10. Operating temperature -40℃ to +85℃
- 11. Storage temperature -40℃ to +85℃

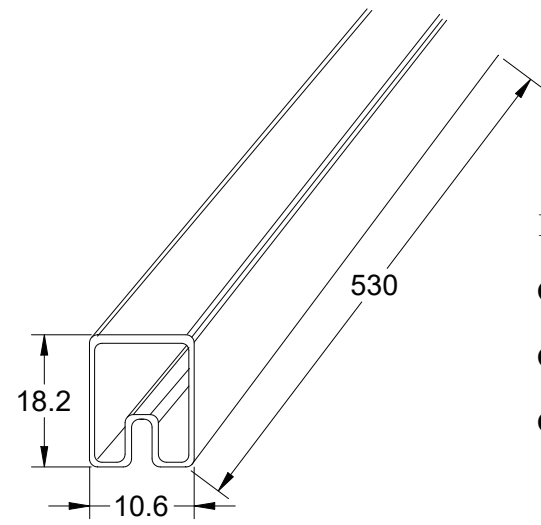


Tube: 530*10.6*18.2mm



Package Quantity:
One Tube=15Pcs
One Inner Carton=15*70=1050Pcs
One Export Carton=1050*4=4200Pcs



Inner Carton: L555*W165*H100mm



Export Carton: L570*W370*H240mm

<div> 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd</div>		TITLE: 100/1000 BASE-T	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: WHDG36001T G	SACLE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 2/2		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGND BY: Sunny.Xu