

Specification for Approval

产品承认书

Customer:	
Customer P/N:	
VOOHU P/N:	WHSG48603PTG
Version No.:	V0.1
Description:	100/1000 BASE-T
	Laser Marking

SUZHOU VOOHU Company Approval		Customer Approval (客户承认签章)
DRAWN	Geoffrey.Song	
CHECKED	Sunny.Xu	
APPROVED	Elvis. Song	
日期DATE::2024/7/13		日期DATE:

Please Return One Copy to Us After Approved,TKS! (承认后请回寄一份,谢谢)

VOOHU 沃虎





—— 连接世界 · 通信未来 ——

苏州沃虎电子科技有限公司
SuZhou Voohu Electronic Tech.Co.,Ltd


地址：江苏省苏州市吴江区阿尔法大厦A栋
ADD: Building A, Alpha Building, Wujiang District,
Suzhou City, Jiangsu Province



TEL: +86 400 1048 018 WEB: www.wohu-tek.com/
+86 13338655578 E-MAIL: wohu@wohu-tek.com

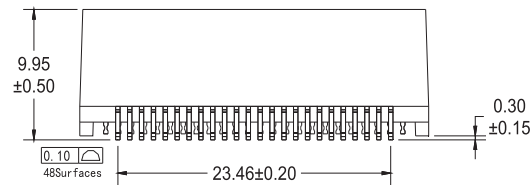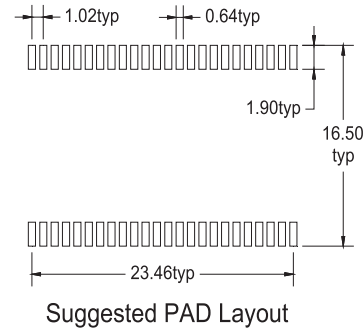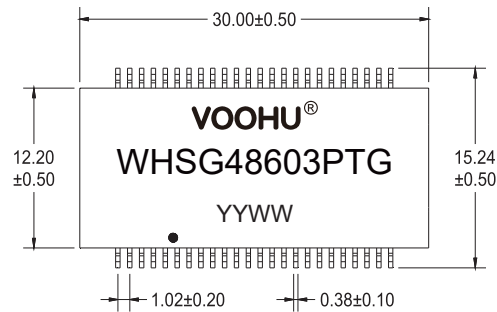A. MECHANICAL(unit:mm)

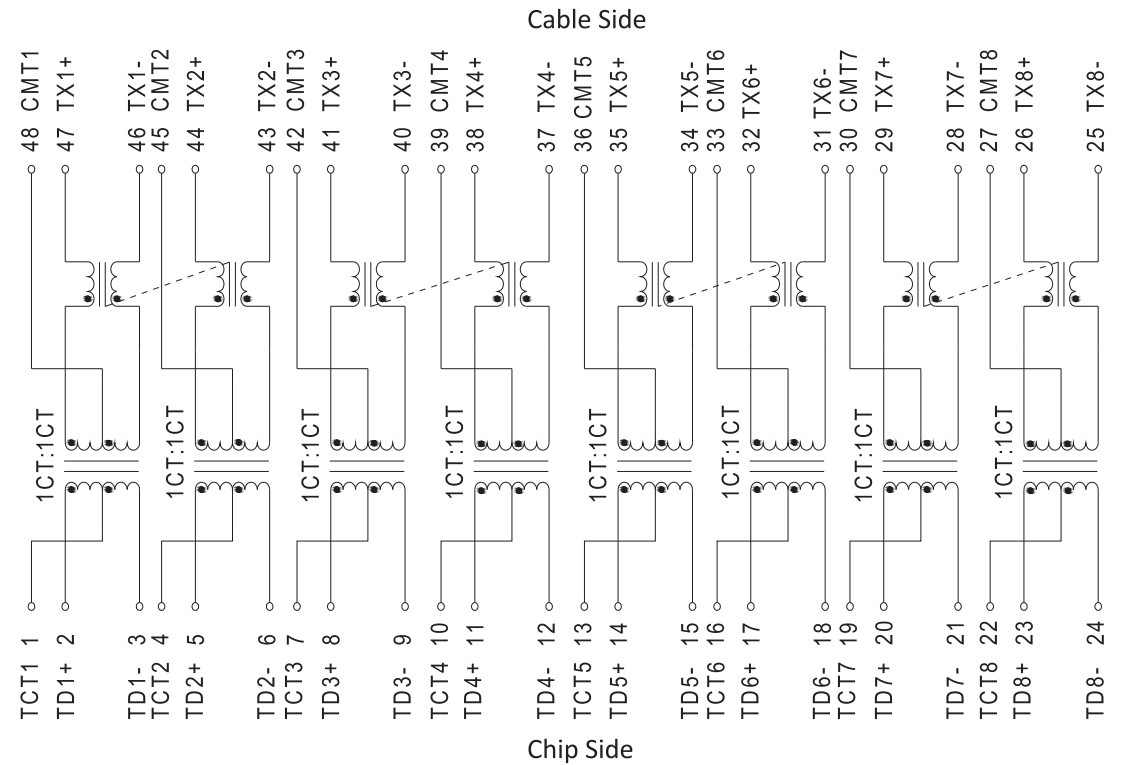

B. SCHEMATICS




 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: 100/1000 BASE-T	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: WHS48603PTG	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song
					.x±0.30	.x°±2.0°	
TEL: +86 400 1048 018	WEB: WWW.WOHU-TEK.COM	REMARK:	SHEET 1/3		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu
					.xxx±0.10	.xxx°±1.0°	

C. ELECTRICAL SPECIFICATIONS @25°C

Unless Otherwise Specified, Testing is Performed at 25°C ± 5°C

1. OCL: 350uH Min @ 100 KHz, 0.1V 21mA DC BIAS
2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
3. DCR: 1.4Ω Max
4. Turns Ratio: 1CT:1CT±5%
5. Insertion Loss: -1.2 dB Max @ 0.5-1 MHz
-0.2-0.002*f^{1.4} dB Max @ 1-125 MHz
6. Return Loss: -16 dB Min @ 1-40 MHz
-10+20*log(f/80) dB Min @ 40.1-100 MHz
7. Cross Talk (Adjacent Channels): -30 dB Min @ 1-100 MHz
8. Common Mode Rejection: -30 dB Min @ 1-100 MHz
9. Isolation Hipot: 1500VAC 1mA 60S
10. Operating temperature -40°C to +85°C(Included The Temperature Rise)
11. Storage temperature -40°C to +85°C
12. 720mA Current Capability--It is suitable for IEEE 802.3at

D. RECOMMEND REFLOW SOLDERING CURVE

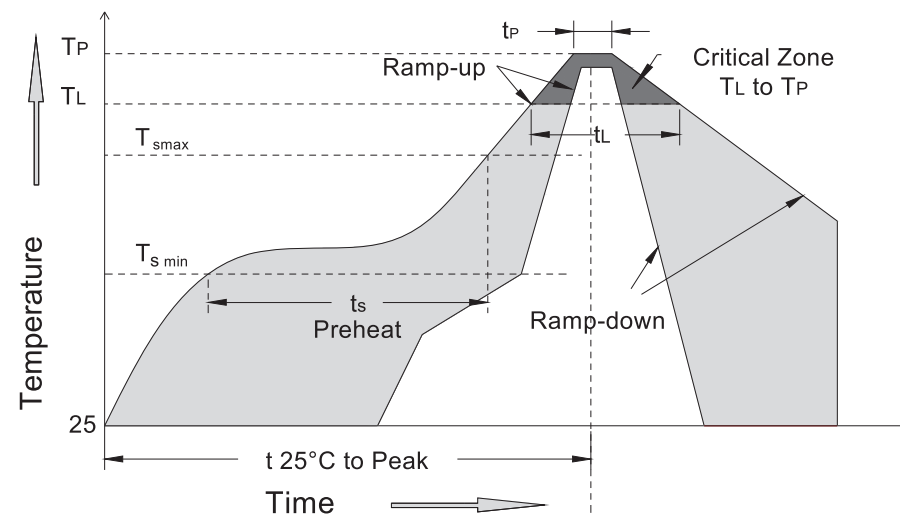

MSL:

Grade: 1 level. Floor life: 0.5 year Condition: ≤30°C/60%RH.

Ramp up rate=3°C/s max Ramp down rate=6°C/s max

TL=217°C tL=60s-150s Tp=250+/-3°C Time within 5°C of actual Peak Temperature (tp): 20~40s

Ts min=150°C Ts max=200°C Ts min to Ts max: 60s-180s, 25°C to peak Temperature: 8minutes max

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
100/1000 BASE-T

PART NO.:
WHS G48603PTG

REMARK:

SIZE
A4

SACLE
1:1

SHEET
2/3

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:
Geoffrey.Song



CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

E. PACKAGE INFORMATION

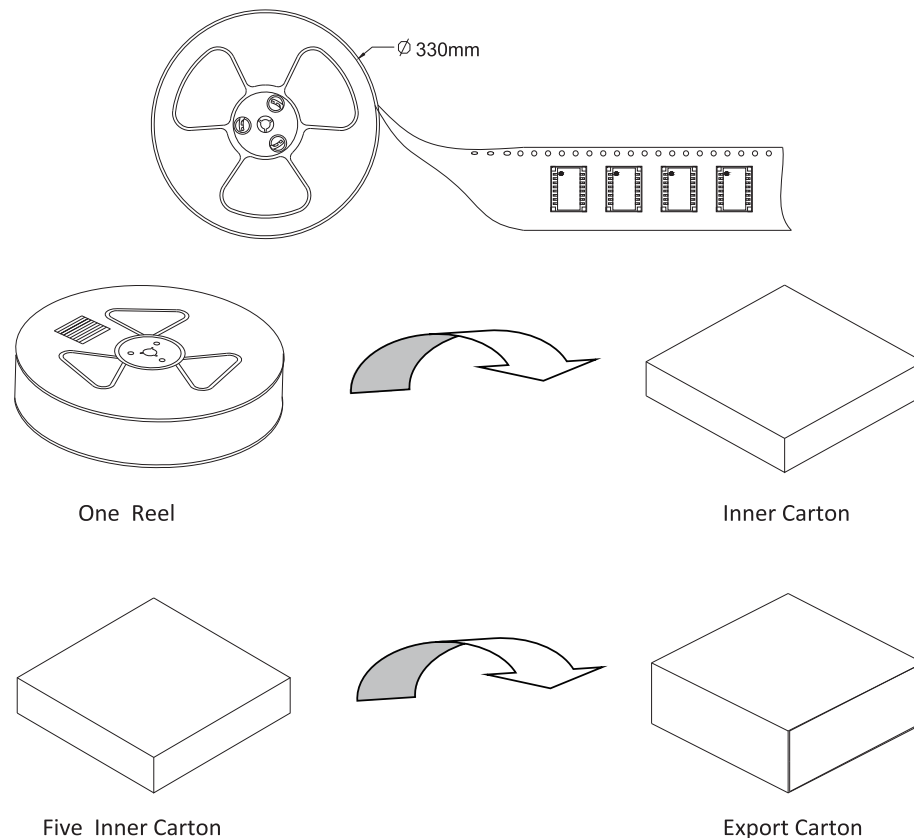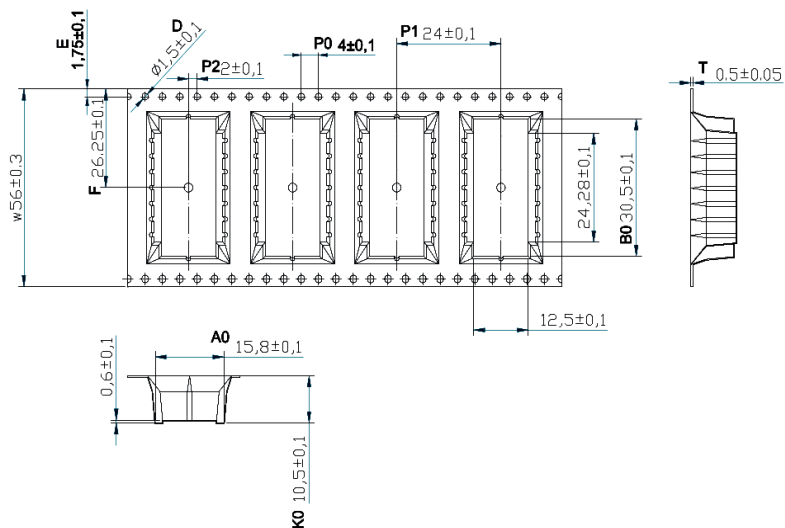

Package Quantity:

One Reel=200Pcs

One Inner Carton=200*1=200Pcs

One Export Carton=200*5=1000Pcs

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
100/1000 BASE-T

PART NO.:
WHS48603PTG

REMARK:


SIZE
A4

SACLE
1:1

SHEET
3/3

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM