

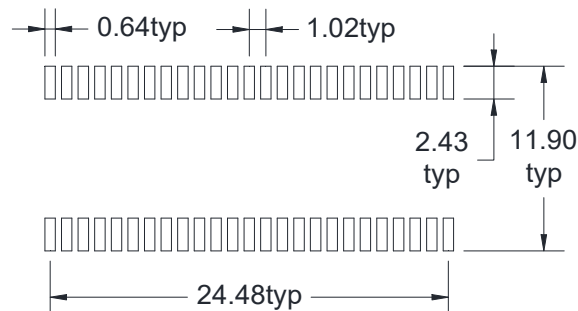



A. MECHANICAL(unit:mm)

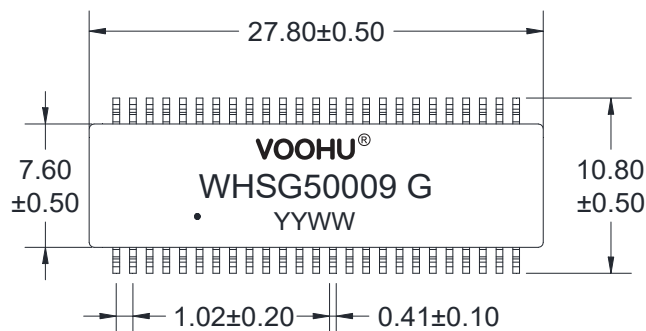

Suggested PAD Layout

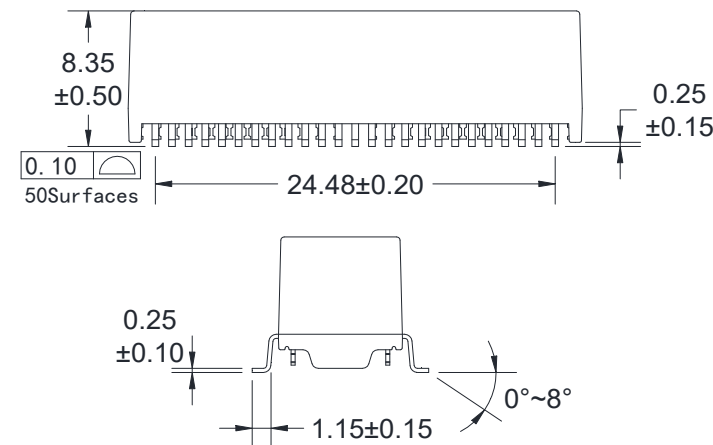

B. SCHEMATICS

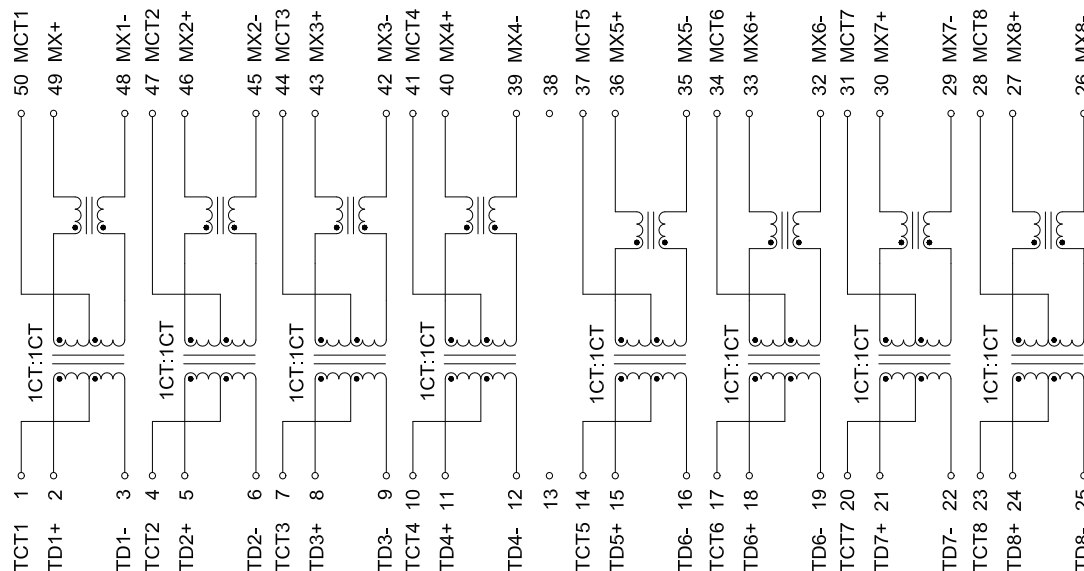

TITLE:

100/1000 BASE-T

SIZE

A4

UNITS

MM[INCH]

GENERAL TOLERANCES

UNLESS SPECIFIED

APPROVED BY:

Geoffrey.Song

PART NO.:

WHSG50009 G

SACLE

1:1

REV

A0

x±0.35

.x±0.30

x°±3.0°

.x°±2.0°


CHECKED BY:

Elvis.Song

REMARK:

SHEET

1/2



.xx±0.25

.xxx±0.10

.xx°±1.5°

.xxx°±1.0°

DESIGND BY:

Sunny.Xu

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd


TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

C. ELECTRICAL SPECIFICATIONS @25℃

1. OCL: 350uH Min @ 100 KHz, 0.1V with 8mA DC BIAS
2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
3. DCR: 1400mΩ Max
4. Turns Ratio: 1CT:1CT±5%
5. Insertion Loss: -1.1 dB Max @ 1-100 MHz
6. Return Loss: -18 dB Min @ 1-30 MHz
 - 14.4 dB Min @ 40 MHz
 - 13.1 dB Min @ 50 MHz
 - 12 dB Min @ 60-80 MHz
 - 10 dB Min @100 MHz
7. Cross Talk: -30 dB Min @ 1-100 MHz
8. Common Mode Rejection: -30 dB Min @ 1-100 MHz
9. Isolation Hipot: 1500VAC 1mA 60S
10. Operating temperature 0℃ to +70℃
11. Storage temperature -40℃ to +85℃

D. PACKAGE INFORMATION

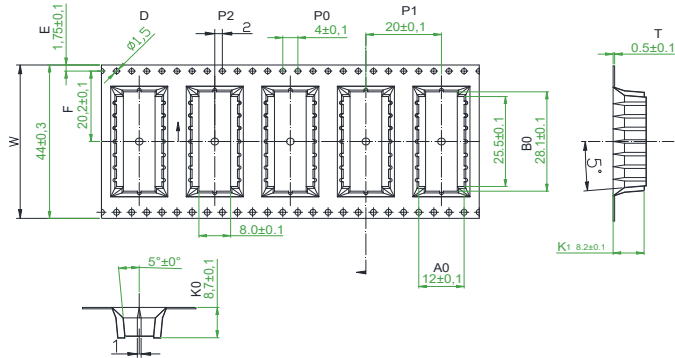




Package Quantity:

One Reel=350Pcs

One Inner Carton=350*2=700Pcs

One Export Carton=700*2=1400Pcs

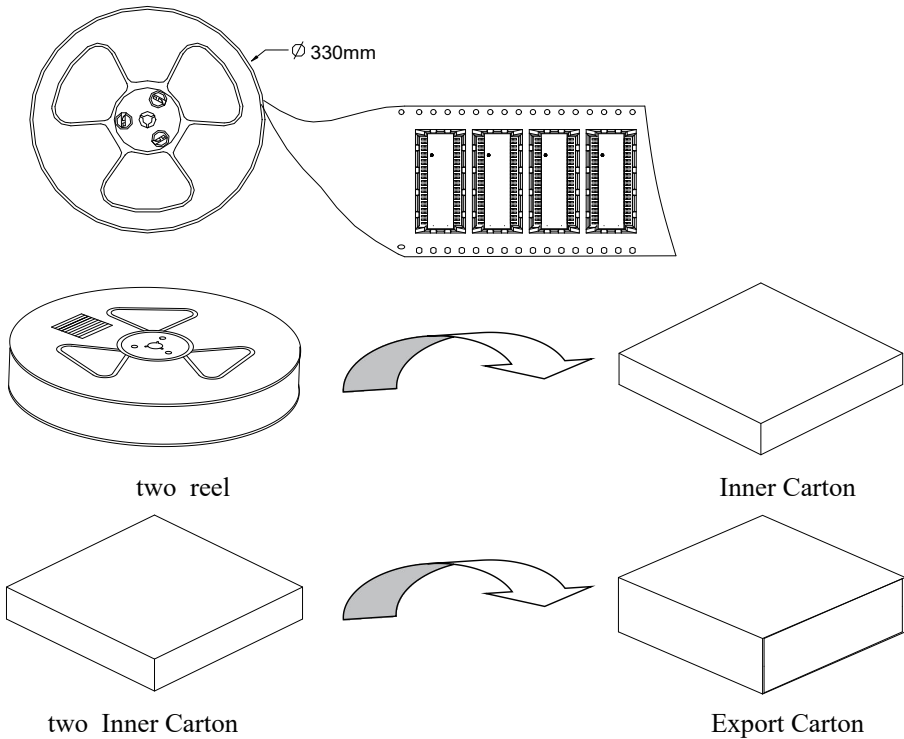

 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: 100/1000 BASE-T	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: WHSG50009 G	SACLE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 2/2		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGND BY: Sunny.Xu