
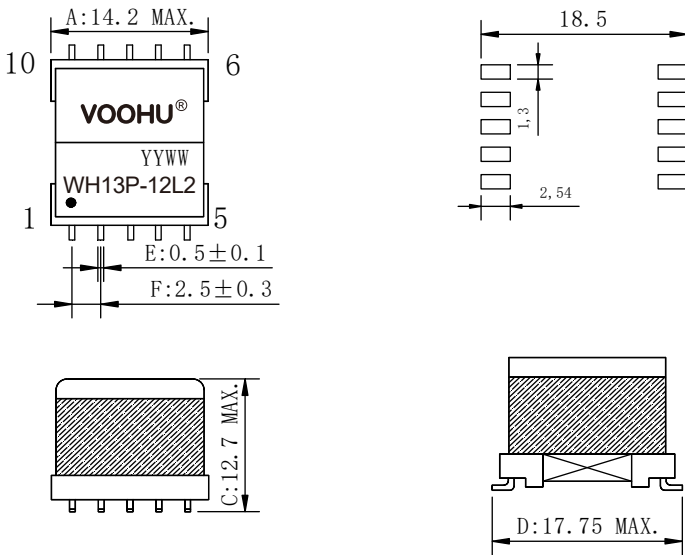


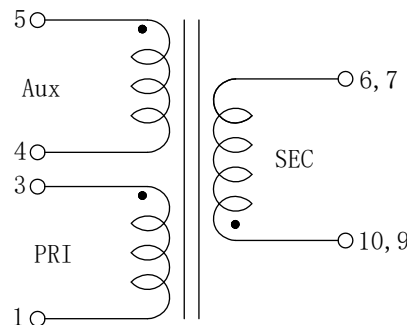

| | | | | | | | | | | | | | | | |
|---|--|------------------|---------------------|---------------------------|----------------|--|---|--|------------|-------------------------------|--|--------------------|--|---|--|
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | | 7 | | 8 | |
| REACH & RoHS COMPLIANT | | | | | | REV. A0 | | ECN / DESCRIPTION NEW | | BY Sunny.Xu | | DATE 2020.06.16 | | | |
| a. Mechanical | | | | | | b. Schematic | | | | | | | | | |
|  | | | | | |  | | | | | | | | | |
| <p>NOTE:</p> <p>1、Dimensions:mm;</p> <p>2、 Unless otherwise specified,tolerances:±0.25(mm);</p> | | | | | | <p>Customer to tie terminals 6&7 and 10&9 on PC board</p> <p>Transformer RoHS Compliance Product Surface Mount Device Providing Compact Footprint Operating temperature range:-40⁰C to +85⁰C</p> | | | | | | | | | |
| Electrical Specifications @ 25℃ | | | | | | | | | | | | | | | |
| Part Number | | Turns Ratio | OCL (10KHz,0.1V) | LL (100KHz,0.1V) | DCR (Ω Max) | | | Hi-Pot (VAC 5mA,3S) | | | | | | | |
| | | 3-1:5-4:10,9-7,6 | 3-1 | 3-1 短其它脚 | 3-1 | 10,9-7,6 | 5-4 | PRI-SEC | | | | | | | |
| WH13P-12L2 | | 1 : 0.25 : 0.45 | 42.9uH±10% | /uH Max | 0.12 | 0.03 | 0.1 | 1500VAC | | | | | | | |
|  苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd | | | | TITLE: 变压器/TRANSFORMER | | SIZE A4 | UNITS MM[INCH] | GENERAL TOLERANCES UNLESS SPECIFIED | | APPROVED BY: Geoffrey.Song | | | | | |
| | | | | PART NO.: WH13P-12L2 | | SACLE 1:1 | REV A0 | .x±0.35 | x°±3.0° | CHECKED BY: Elvis.Song | | | | | |
| | | | | | | | | .x±0.30 | .x°±2.0° | | | | | | |
| TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM | | | | REMARK: | | SHEET 1/1 |  | .xx±0.25 | .xx°±1.5° | DESIGND BY: Sunny.Xu | | | | | |
| | | | | | | | | .xxx±0.10 | .xxx°±1.0° | | | | | | |