

1  
2  
3  
4  
5  
6  
7  
8

REACH & RoHS  
COMPLIANT

H

G

F

E


D

C

B


A

a. Mechanical

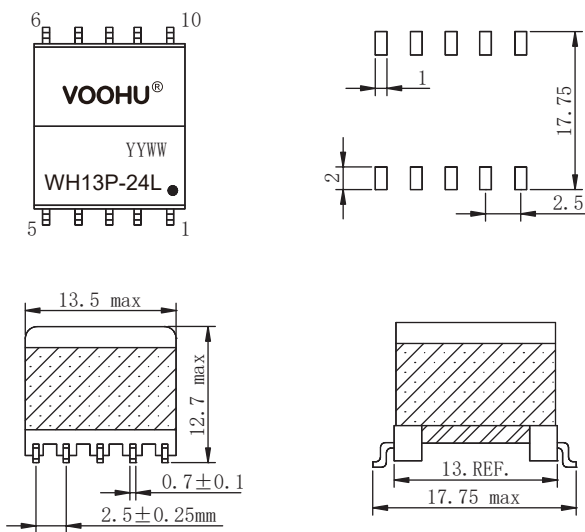

NOTE:  
1、Dimensions:mm;  
2、Unless otherwise specified,tolerances:±0.25(mm);

b. Schematic

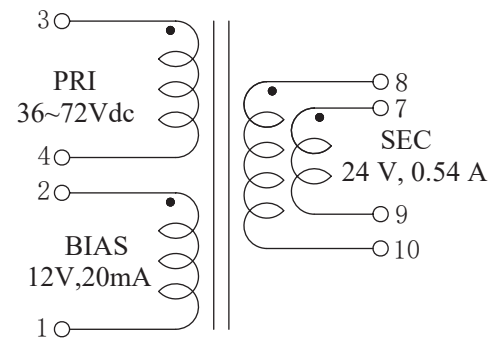


- \* Flyback Transformer
- \* RoHS Compliance Product
- \* Surface Mount Device Providing Compact Footprint
- \* Operating temperature range:-40<sup>0</sup>C to +125<sup>0</sup>C

Electrical Specifications @ 25℃

Part Number	Power(W)	Turns Ratio		Inductance		Leakage inductance	DCR max (Ohms) <sup>4</sup>			Ipk <sup>3</sup> (A)	Output <sup>7</sup>
		pri : sec	pri : bias	at 0 A <sup>2</sup> ±10% (μH)	at Ipk <sup>3</sup> min (μH)	max (μH) <sup>5</sup>	pri	bias	sec		
WH13P-24L	13	1:0.667	1:0.50	127	114.3	0.600	0.255	0.315	0.067	1.0	24 V, 0.54 A

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018      WEB: [WWW.WOHU-TEK.COM](http://WWW.WOHU-TEK.COM)

TITLE: 变压器/TRANSFORMER	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
PART NO.: WH13P-24L	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY:
			.x±0.30	.x°±2.0°	Elvis.Song
REMARK:	SHEET 1/1		.xx±0.25	.xx°±1.5°	DESIGND BY:
			.xxx±0.10	.xxx°±1.0°	Sunny.Xu