



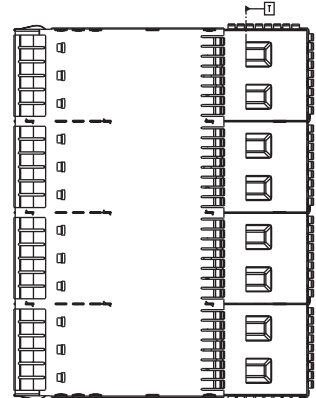
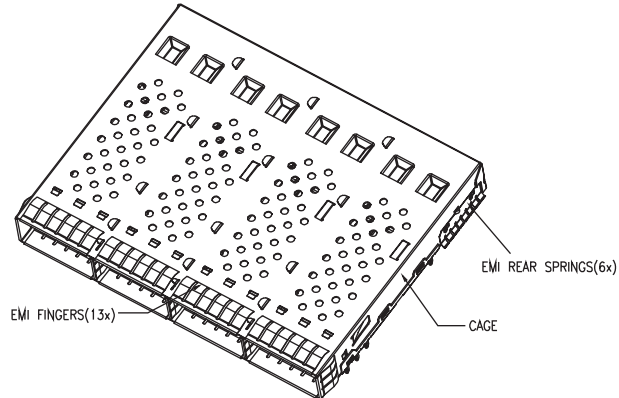

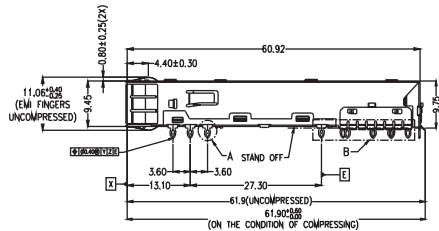


Customer drawings

H
G
F
E
D
C
B
A



DETAIL: A
SCALE 5:1

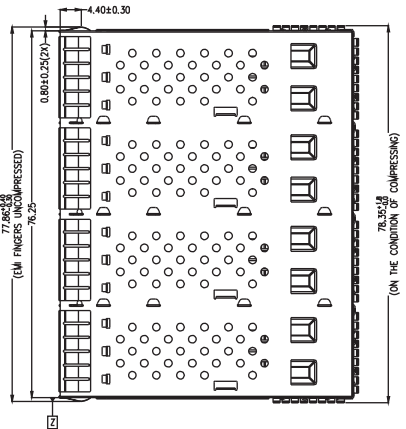



DETAIL: B
SCALE 2:1



NOTE:
1, DESCRIPTION Q'ty MATERIAL PLATING
01 CAGE 1PCS STAINLESS STEEL N/A
02 EMI FINGERS 13PCS COPPER ALLOY NI FOR ALL
03 EMI REAR SPRINGS 6PCS STAINLESS STEEL N/A
2, TEMPERATURE:
OPERATION: -40°C~+105°C
STORAGE: -55°C~+105°C

<div><div>VOOHU</div><div>苏州沃虎电子科技有限公司</div><div>Su Zhou Voohu Electronic Tech.Co.Ltd</div></div>			TITLE: 高速接口28G 19.00mm 1*4 CAGE带散热片		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: WH81-164-00020-1		SACLE 1:1	REV A0	.x±0.35	x°±3.0°	CHECKED BY: Elvis.Song	
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM			REMARK:		SHEET 1/3		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu	
							.xxx±0.10	.xxx°±1.0°		

H
G
F
E
D
C
B
A

1	2	3	4	5	6	7	8	
Customer drawings								
RECOMMENDED BEZEL CUT-OUT SINGLE SIDE APPLICATIONS								
RECOMMENDED BEZEL CUT-OUT BELLY TO BELLY APPLICATIONS								
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: 高速接口28G 19.00mm 1*4 CAGE带散热片		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: WH81-164-00020-1		SACLE 1:1	REV A0	.xx±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:		SHEET 2/3		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGND BY: Sunny.Xu
1	2	3	4	5	6	7	8	



RECOMMENDED BEZEL CUT-OUT SINGLE SIDE APPLICATONS

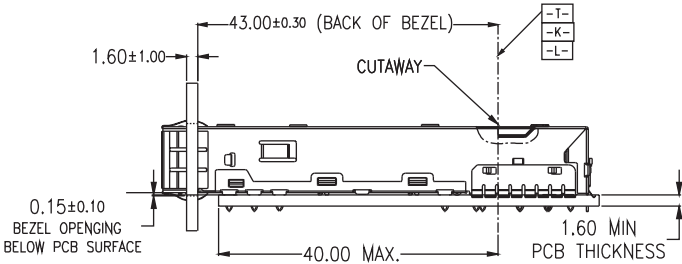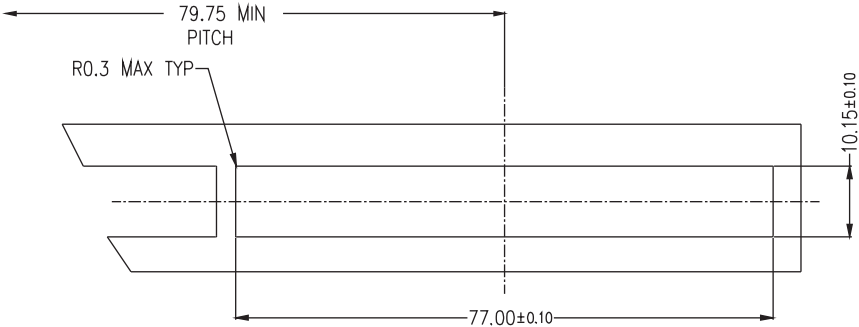

RECOMMENDED BEZEL CUT-OUT BELLY TO BELLY APPLICATONS

Customer drawings

THIS AREA DENOTES
COMPONENT KEEP-OUT
(INSULATION TRACES ALLOWED)

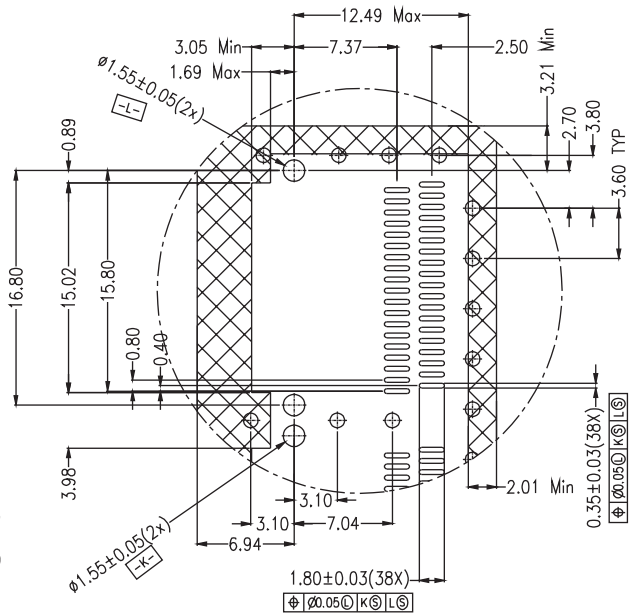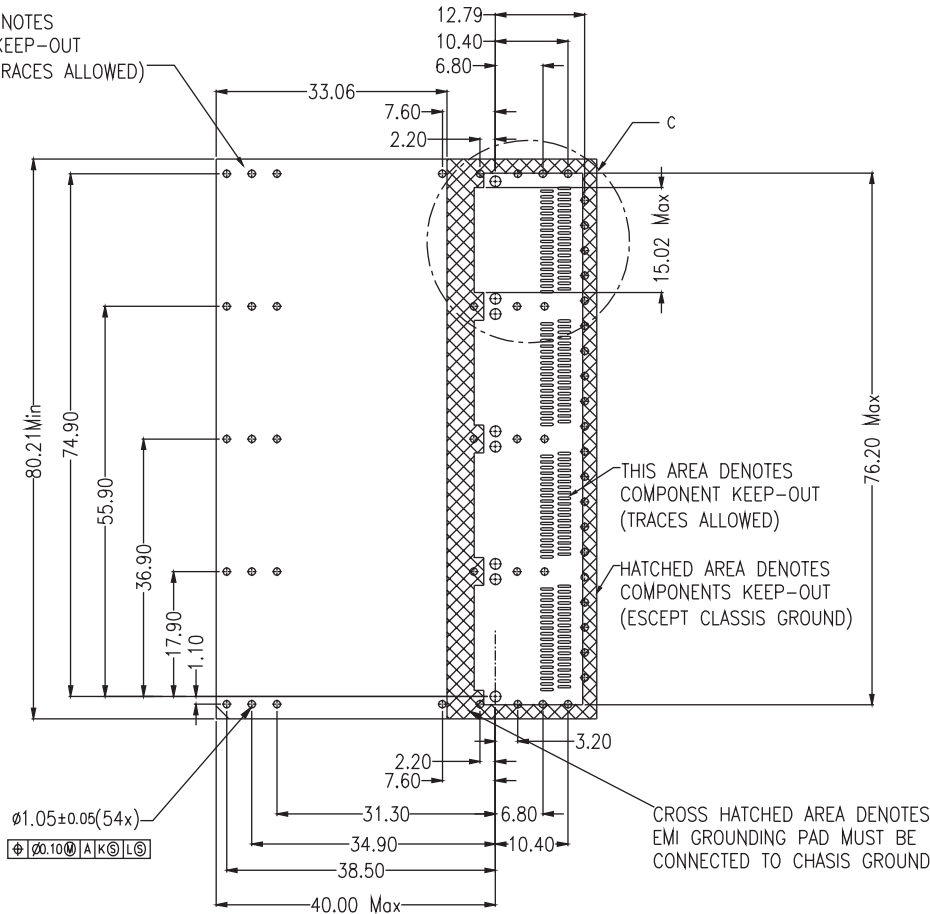

DETAIL: C
SCALE: 2:1

PCB LAYOUT FOR SINGLE SIDED APPLICATION

- NOTES:
1. SEE QSFP MSA SPECIFICATION FOR BEZEL LOCATION TOLERANCE
 2. DATUM -A- IS TIP SURFACE OF HOST BOARD PER MSA
 3. FINISHED HOLE SIZE (AFTER PLATING)
 4. DATUM -K- IS HOST BOARD THRE HOLE #1 TO ACCEPT CONNECTOR GUIDE POST PER MSA
 5. DATUM -L- IS HOST BOARD THRE HOLE #2 TO ACCEPT CONNECTOR GUIDE POST PER MSA
 6. DATUM -T- IS HARD STOP ON CAGE PER MSA

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: 高速接口28G 19.00mm
1*4 CAGE带散热片

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WH81-164-00020-1

SACLE
1:1

REV
A0

$x \pm 0.35$
 $.x \pm 0.30$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$

CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
3/3



$.xx \pm 0.25$
 $.xxx \pm 0.10$

$.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

DESIGND BY:
Sunny.Xu