


1	2	3	4	5	6	7	8																				
REACH & RoHS COMPLIANT																											
<div>Features</div> <div><div>■</div> RoHS compliance.</div> <div><div>■</div> Common mode filter, good temperature resistance.</div> <div><div>■</div> The products contain no lead and also support lead-free soldering.</div>				<div>Applications</div> <div><div>■</div> Headlights, Car USB Interface, Audio, Car DVD.</div> <div>Test Conditions</div> <div><div>■</div> All test data is referenced to 25℃ ambient.</div> <div><div>■</div> Operating temperature range -40℃ to +125℃.(Including self - temperature rise).</div>																							
<div>External Dimensions (Unit:m/m)</div> <div><div><div><div><div>1</div><div>2</div></div><div><div>A1</div><div>A</div></div><div><div>4</div><div>B</div><div>3</div></div><div>501</div></div><div><div><div>G</div><div>D</div></div><div><div>E</div><div>F</div></div><div><div><div>C</div></div></div></div></div></div>																											
<table><tr><th>TYPE</th><th>A</th><th>A1</th><th>B</th><th>C Max</th><th>D Typ</th><th>E Typ</th><th>F Typ</th><th>G Typ</th><th>Q'TY/Reel</th></tr><tr><td>WHACM15A60</td><td>15.0±0.5</td><td>15.6±0.5</td><td>13.0±0.5</td><td>6.6</td><td>9.4</td><td>2.6</td><td>3.8</td><td>2.5</td><td>350</td></tr></table>								TYPE	A	A1	B	C Max	D Typ	E Typ	F Typ	G Typ	Q'TY/Reel	WHACM15A60	15.0±0.5	15.6±0.5	13.0±0.5	6.6	9.4	2.6	3.8	2.5	350
TYPE	A	A1	B	C Max	D Typ	E Typ	F Typ	G Typ	Q'TY/Reel																		
WHACM15A60	15.0±0.5	15.6±0.5	13.0±0.5	6.6	9.4	2.6	3.8	2.5	350																		
<div>Part Number Code</div> <div><div><div>WHACM</div><div>Series Name</div></div><div><div>15</div><div>Dimensions:</div><div>L*W</div></div><div><div>A</div><div>Materials</div></div><div><div>60</div><div>Dimensions:</div><div>H</div></div><div><div>R</div><div>Tolerance</div></div><div><div>501</div><div>Imductance</div></div></div>																											
<div><div><div>VOOHU</div><div>苏州沃虎电子科技有限公司</div><div>Su Zhou Voohu Electronic Tech.Co.Ltd</div></div><div><div>TEL: +86 400 1048 018</div><div>WEB: WWW.WOHU-TEK.COM</div></div></div>		TITLE:		SIZE	UNITS	GENERAL TOLERANCES		APPROVED BY:																			
		Common Mode Chokes		A4	MM[INCH]	UNLESS SPECIFIED		Geoffrey.Song																			
		PART NO.:		SACLE	REV	x±0.35	x°±3.0°	CHECKED BY:																			
		WHACM15A60R501		1:1	A0	.x±0.30	.x°±2.0°	Elvis.Song																			
		REMARK:		SHEET		.xx±0.25	.xx°±1.5°	DESIGND BY:																			
						.xxx±0.10	.xxx°±1.0°	Sunny.Xu																			

REACH & RoHS  
COMPLIANT


WHACM-A Series

Part Number	Z(Ω) 100MHz/0.1V		DC Resistance (mΩ) Max.	Rated DC Current (A)Max.	Insulation Resistance (MΩ)Min.	Rated Voltage (V)Max.
	Min.	Ref.				
WHACM15A60R501	400	500	6	10	10	80

Characteristics(Reference)

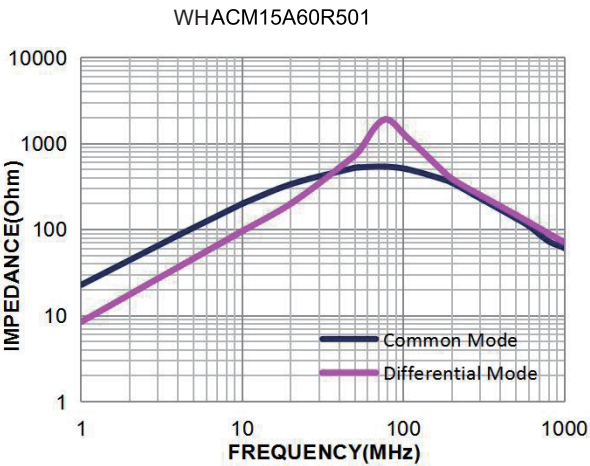

Recommended Soldering Conditions

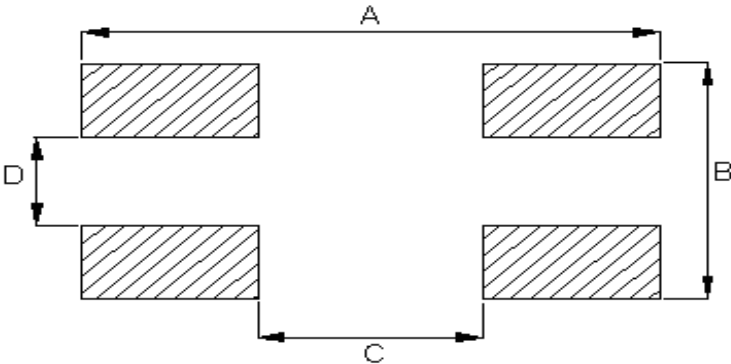

TYPE	A Typ	B Typ	C Typ	D Typ
WHACM07A40	8	5	3	1.5
WHACM09A50	10.5	5.5	5	1.5
WHACM12A65	12.5	8.5	6.5	2.0
WHACM15A60	9.5	9.5	8.8	3.3

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: [WWW.WOHU-TEK.COM](http://WWW.WOHU-TEK.COM)

TITLE:  
Common Mode Chokes

PART NO.:  
WHACM15A60R501

REMARK:


SIZE  
A4

SACLE  
1:1

SHEET  
2/2

UNITS  
MM[INCH]

REV  
A0



GENERAL TOLERANCES  
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:  
Geoffrey.Song

CHECKED BY:  
Elvis.Song

DESIGND BY:  
Sunny.Xu