




REACH & RoHS
COMPLIANT




TOP VIEW

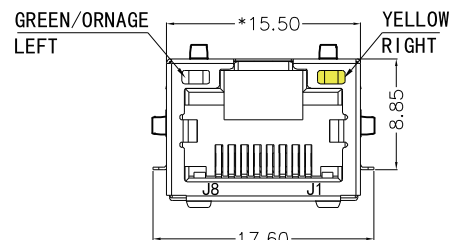


FRONT VIEW



BOTTOM VIEW

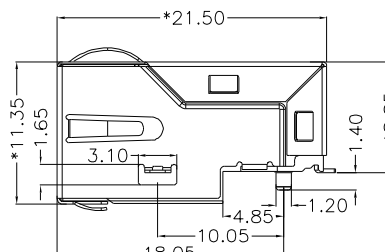

RIGHT SIDE VIEW

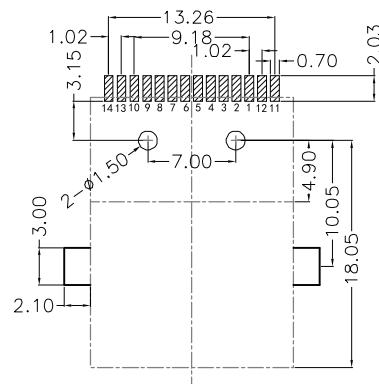

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: LCP,UL94V-0,BLACK.

TERMINALS BRACKET: LCP,UL94V-0,BLACK.

SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.

TERMINAL: PHOSPHOR BRONZE C5191,T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:

DURABILITY: 750 CYCLES MIN.

MATING FORCE: 23N MAX.

OPERATING TEMPERATURE: -40°C~+85°C.

STORAGE TEMPERATURE: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH "*"

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
TAB-UP 1X1 10G 贴片

PART NO.:
SYT211Q639DF5A7CBS1057

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/4

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song


DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REACH & RoHS
COMPLIANT


Suggested Panel Opening:

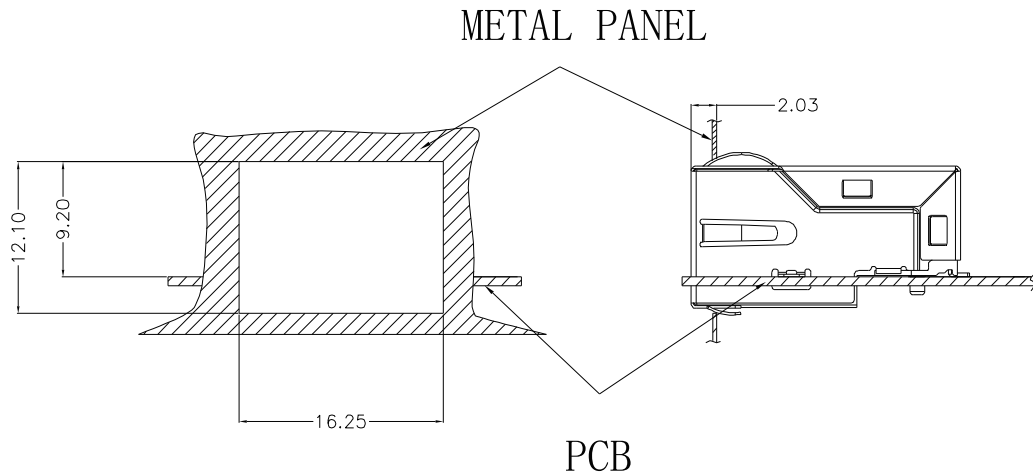

UNIT: mm / inch

Tolerances: ± 0.10 / 0.004

Keep-Out Area (Component Side View):

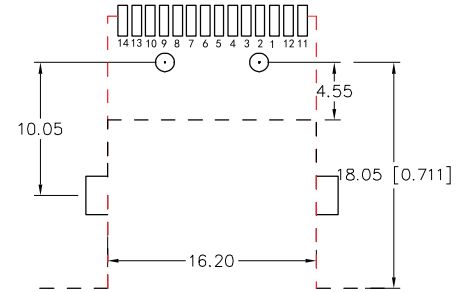

Plug In Side

UNIT: mm / inch

Tolerances: ± 0.10 / 0.004

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
TAB-UP 1X1 10G 贴片

PART NO.:
SYT211Q639DF5A7CBS1057

REMARK:


SIZE
A4

SACLE
1:1

SHEET
2/4

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song



CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REACH & RoHS
COMPLIANT

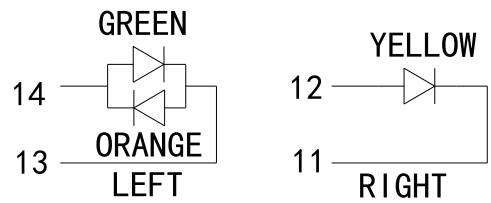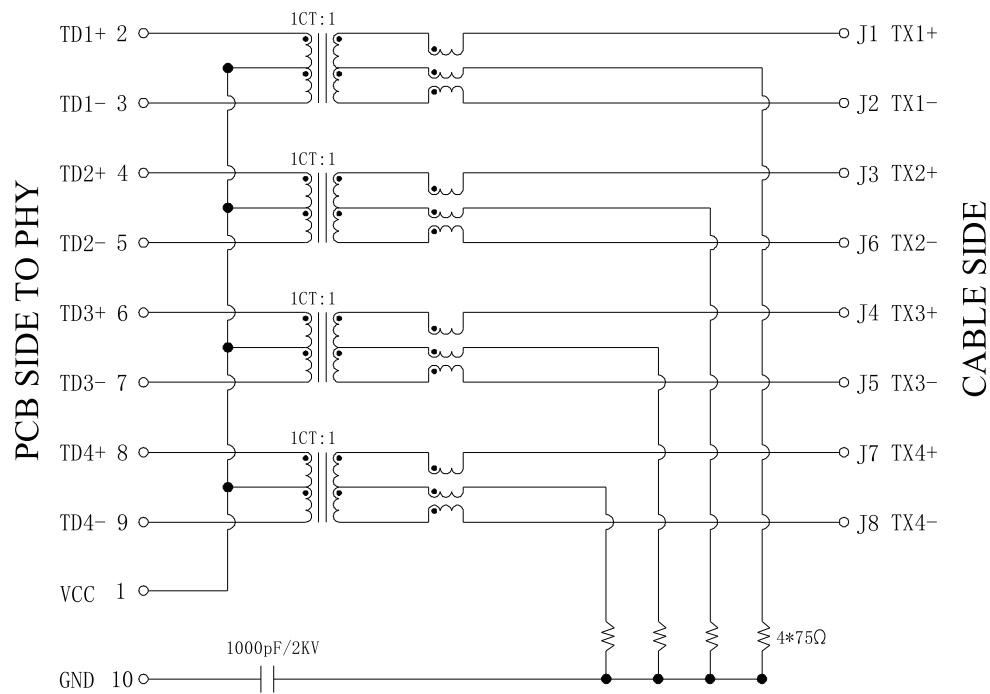

Electrical:

- 1.Turn ratio:2~3:J1~J2=1CT:1CT(±2%).
4~7:J3~J6=1CT:1CT(±2%).
5~6:J4~J5=1CT:1CT(±2%).
8~9:J7~J8=1CT:1CT(±2%).
- 2.OCL:160 uH MIN @ 100 KHz, 100 mV
- 3.Insertion Loss: -3.0 dB Max 100MHz.
-2.0 dB Max 1~400MHz.
- 4.Return loss: -16dB Min 1~40MHz;
-16+10LOG(f/40)dB 40~400MHz.
-6+30LOG(f/400)dB 40~500MHz.
- 5.Cross talk: -30dB Min 1~40MHz;
-28dB Min 40~100MHz;
-26dB Min 100~500MHz;
- 6.CMR: -30dB Min 1~250MHz;
-22dB Min 250~500MHz;
- 7.Hi-Pot:2250V DC 6S 1mA PRI TO SEC

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	565nm	20mA	2.2-2.4V
Orange	605nm	20mA	2.0-2.5V
Yellow	590nm	20mA	2.1-2.5V

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
TAB-UP 1X1 10G 贴片

PART NO.:
SYT211Q639DF5A7CBS1057

REMARK:

SIZE
A4

SACLE
1:1

SHEET
3/4

UNITS
MM[INCH]

REV
A0

GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°


APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

REACH & RoHS
COMPLIANT

PROFILE OF REFLOW SOLDERING

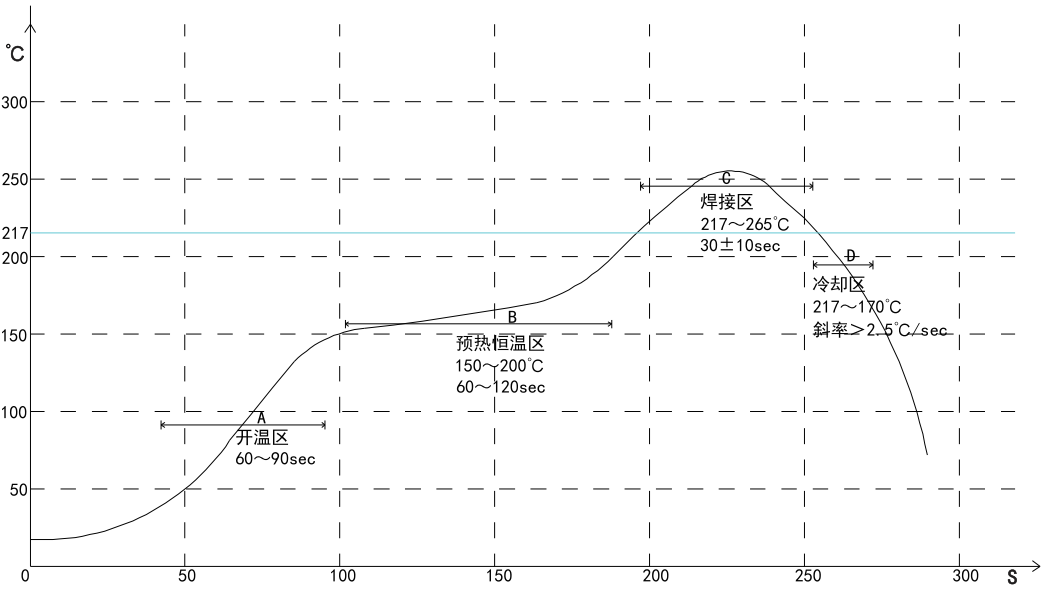

A. Temperature range of open
B. Preheat temperature zone
C. The welding zone
D. The cooling zone
Tip temperature: 265±5°C.
Tip temperature time: 30±10Sec.
Tip melting point of Sn96.5/Ag3/Cu0.5.

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd


TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
TAB-UP 1X1 10G 贴片
PART NO.:
SYT211Q639DF5A7CBS1057

REMARK:

SIZE
A4
SACLE
1:1
SHEET
4/4



UNITS
MM[INCH]
REV
A0
GENERAL TOLERANCES
UNLESS SPECIFIED
x±0.35
.x±0.30
.xx±0.25
.xxx±0.10
x°±3.0°
.x°±2.0°
.xx°±1.5°
.xxx°±1.0°

APPROVED BY:
Geoffrey.Song
CHECKED BY:
Elvis.Song
DESIGND BY:
Sunny.Xu