




A	<div><div>VOOHU</div><div>苏州沃虎电子科技有限公司</div><div>Su Zhou Voohu Electronic Tech.Co.Ltd</div></div>		TITLE: TAB-DOWN 1X2	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT112B035AB1A1DA	SACLE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song	
	TEL: +86 400 1048 018      WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 1/4		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGND BY: Sunny.Xu	



1		2		3		4		5		6		7		8																																																					
REACH & RoHS COMPLIANT												REV.	ECN / DESCRIPTION		BY	DATE																																																			
												A0	NEW		Sunny.Xu	2018.07.26																																																			
<div><div>PCB SIDE TO PHY</div><div><div>1</div><div>2</div><div>3</div><div>4</div><div>5</div><div>6</div><div>7</div><div>8</div></div><div><div>J1</div><div>J2</div><div>J3</div><div>J4</div><div>J5</div><div>J6</div><div>J7</div><div>J8</div></div><div>CABLE SIDE</div></div> <div><div>Electrical:</div><div><div>1.Voltage ratign:125V AC.</div><div>2.Insulation resistance: 500 mega ohms minimum initial after 500V DC for 1minute.</div><div>3.Low level Contact resistance: Single terminal 30 milliohms Max initial 50 milliohms maximum after durabilty test.</div></div></div> <div><div>LED Specification</div><table><tr><td>Standard LED Color</td><td>LED Wavelength</td><td>Foward(A)</td><td>Foward(V)</td></tr><tr><td>Green</td><td>568nm</td><td>20mA</td><td>1.85-2.45V</td></tr><tr><td>Yellow</td><td>585nm</td><td>20mA</td><td>1.7-2.2V</td></tr></table><div><div><div><div>YELLOW</div><div>9</div><div>10</div><div>LEFT</div></div><div><div>GREEN</div><div>11</div><div>12</div><div>RIGHT</div></div></div></div></div> <tr><td colspan="2"><div><div><div><div>VOOHU</div><div>苏州沃虎电子科技有限公司</div><div>Su Zhou Voohu Electronic Tech.Co.Ltd</div></div></div></div></td><td colspan="2">TITLE: TAB-DOWN 1X2</td><td>SIZE A4</td><td>UNITS MM[INCH]</td><td colspan="2">GENERAL TOLERANCES UNLESS SPECIFIED</td><td colspan="2">APPROVED BY: Geoffrey.Song</td></tr> <tr><td colspan="2" rowspan="2"></td><td colspan="2">PART NO.: SYT112B035AB1A1DA</td><td rowspan="2">SACLE 1:1</td><td rowspan="2">REV A0</td><td>.xx±0.35</td><td>x°±3.0°</td><td colspan="2">CHECKED BY: Elvis.Song</td></tr> <tr><td colspan="2"></td><td>.x±0.30</td><td>.x°±2.0°</td><td colspan="2"></td></tr> <tr><td colspan="2" rowspan="2">TEL: +86 400 1048 018  WEB: WWW.WOHU-TEK.COM</td><td colspan="2" rowspan="2">REMARK:</td><td rowspan="2">SHEET 3/4</td><td rowspan="2"></td><td>.xx±0.25</td><td>.xx°±1.5°</td><td colspan="2">DESIGND BY: Sunny.Xu</td></tr> <tr><td>.xxx±0.10</td><td>.xxx°±1.0°</td><td colspan="2"></td></tr>																Standard LED Color	LED Wavelength	Foward(A)	Foward(V)	Green	568nm	20mA	1.85-2.45V	Yellow	585nm	20mA	1.7-2.2V	<div><div><div><div>VOOHU</div><div>苏州沃虎电子科技有限公司</div><div>Su Zhou Voohu Electronic Tech.Co.Ltd</div></div></div></div>		TITLE: TAB-DOWN 1X2		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song				PART NO.: SYT112B035AB1A1DA		SACLE 1:1	REV A0	.xx±0.35	x°±3.0°	CHECKED BY: Elvis.Song				.x±0.30	.x°±2.0°			TEL: +86 400 1048 018  WEB: WWW.WOHU-TEK.COM		REMARK:		SHEET 3/4		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu		.xxx±0.10	.xxx°±1.0°		
Standard LED Color	LED Wavelength	Foward(A)	Foward(V)																																																																
Green	568nm	20mA	1.85-2.45V																																																																
Yellow	585nm	20mA	1.7-2.2V																																																																
<div><div><div><div>VOOHU</div><div>苏州沃虎电子科技有限公司</div><div>Su Zhou Voohu Electronic Tech.Co.Ltd</div></div></div></div>		TITLE: TAB-DOWN 1X2		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song																																																											
		PART NO.: SYT112B035AB1A1DA		SACLE 1:1	REV A0	.xx±0.35	x°±3.0°	CHECKED BY: Elvis.Song																																																											
						.x±0.30	.x°±2.0°																																																												
TEL: +86 400 1048 018  WEB: WWW.WOHU-TEK.COM		REMARK:		SHEET 3/4		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu																																																											
						.xxx±0.10	.xxx°±1.0°																																																												

PCB SIDE TO PHY




CABLE SIDE

Electrical:

- 1.Voltage ratign:125V AC.
- 2.Insulation resistance: 500 mega ohms minimum initial after 500V DC for 1minute.
- 3.Low level Contact resistance: Single terminal 30 milliohms Max initial 50 milliohms maximum after durabilty test.

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

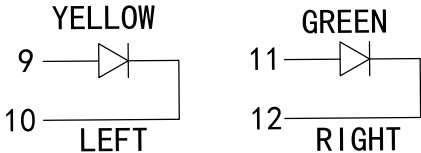

苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:  
TAB-DOWN 1X2

PART NO.:  
SYT112B035AB1A1DA

REMARK:

SIZE  
A4

SACLE  
1:1

SHEET  
3/4



UNITS  
MM[INCH]

REV  
A0

GENERAL TOLERANCES  
UNLESS SPECIFIED

x±0.35  
.x±0.30  
.xx±0.25  
.xxx±0.10

APPROVED BY:  
Geoffrey.Song


CHECKED BY:  
Elvis.Song

DESIGND BY:  
Sunny.Xu

REACH & RoHS  
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	Sunny.Xu	2018.07.26

PROFILE OF WAVE SOLDER

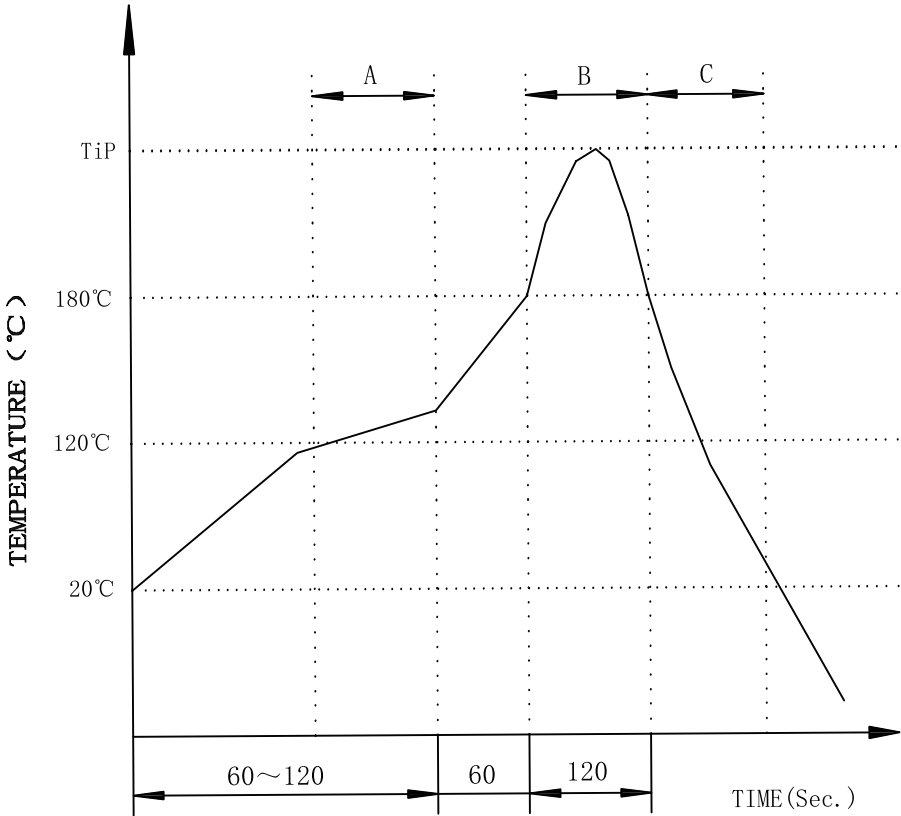

A.Preheating B.Soldering C.Gradual Cooling  
Tip temperature:260±5°C.  
Tip temperature time:5Sec Max.  
Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

Remarks: after wave soldering, the plastic positioning columns of the product which under the PCB will be slightly melted, but it won't affect its function.

<div>VOOHU</div> <div>苏州沃虎电子科技有限公司</div> <div>Su Zhou Voohu Electronic Tech.Co.Ltd</div>	TITLE: TAB-DOWN 1X2		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
	PART NO.: SYT112B035AB1A1DA		SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song
	REMARK:		SHEET 4/4		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu
TEL: +86 400 1048 018		WEB: WWW.WOHU-TEK.COM			.xxx±0.10	.xxx°±1.0°	