
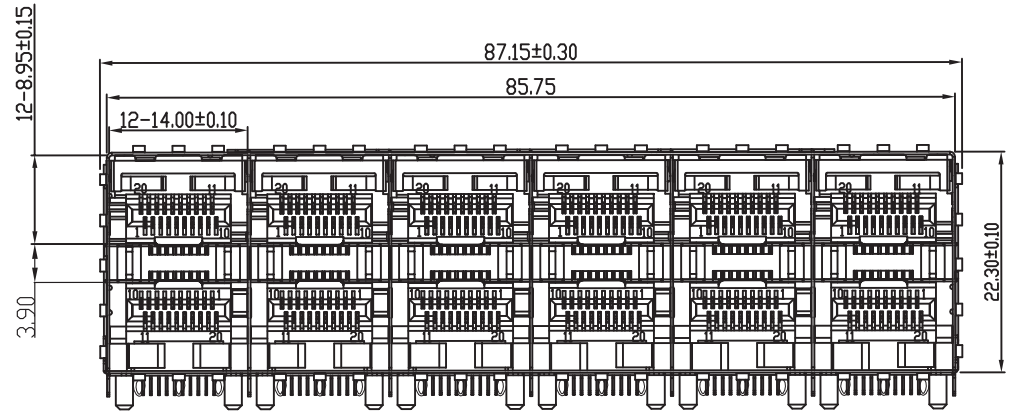


CUSTOMER DRAWING

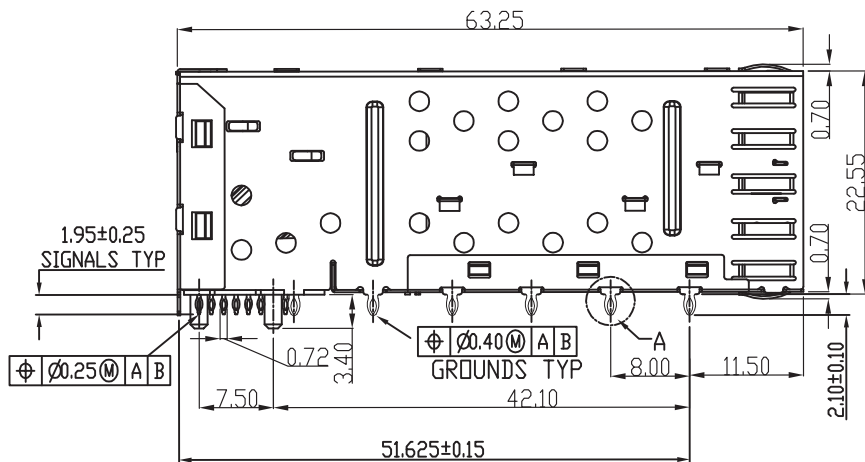

NOTE:

MECHANICAL:

1. CONTACT: PHOSPHOR BRONZE C5210-EH T=0.20mm.
2. CONNECTOR HOUSING: LCP UL 94V-0. COLOR: BLACK.
3. MOULDED INSET: LCP UL 94V-0. COLOR: BLACK.
4. CAGE: COPPER ALLOY C7701 T=0.25mm.

PLATED:


1. CONTACT MATING AREA : PLATING GOLD 0.76 MICROMETERS MINIMUM OVER 1.27 MICROMETERS MINIMUM NICKLE
2. CONTACT NEEDLE EYE: 1.27 MICROMETERS MINIMUM MATTE TIN OVER 1.27 MICROMETERS MINIMUM NICKEL

MECHANICAL REQUIREMENT:

1. DURABILITY: 100 CYCLES MIN.
2. INSERTION AND EXTRACTION FORCE: 40N MAX & 11.5N MAX

ENVIRONMENTAL:

1. LOW LEVEL CONTACT RESITANCE(LLCR):  
ΔR 10 MILLIOHMS MAXIMUM FOR SHIELD AND SIGNAL CONTACTS.
2. WITHSTANDING VOLTAGE: 300V AC/MAX.
3. INSULATION RESISTANCE: 1x10<sup>9</sup> OHMS MINIMUM.
4. RATINGS CURRENT: SIGNAL APPLICATION ONLY.
5. RATINGS VOLTAGE: 120 volts AC.
6. OPERATION: -40°C~+85°C.
7. STORAGE: -55°C~+105°C.
8. ROHS COMPLIANT.



RoHS Compliant



苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:SFP 2\*6  
CONNECTOR LOW PROFILE

PART NO.:  
WHSFP06326F001

REMARK:  
PLATE GOLD 30u”


SIZE  
A4

SACLE  
1:1

SHEET  
1/4

UNITS  
MM[INCH]

REV  
A0



GENERAL TOLERANCES  
UNLESS SPECIFIED


x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:  
Geoffrey.Song



CHECKED BY:  
Elvis.Song

DESIGND BY:  
Sunny.Xu

CUSTOMER DRAWING

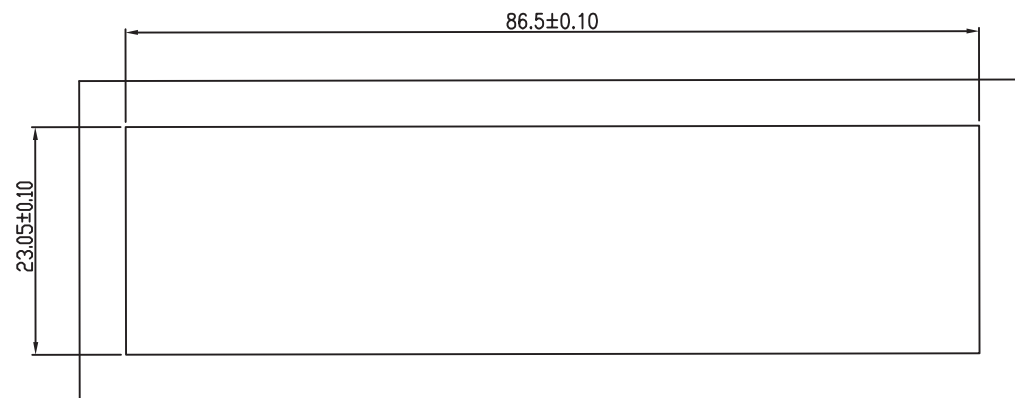

BEZEL CUT-OUT CENTER SPACING DETAIL  
BEZEL THICKNESS:0.8-2.6

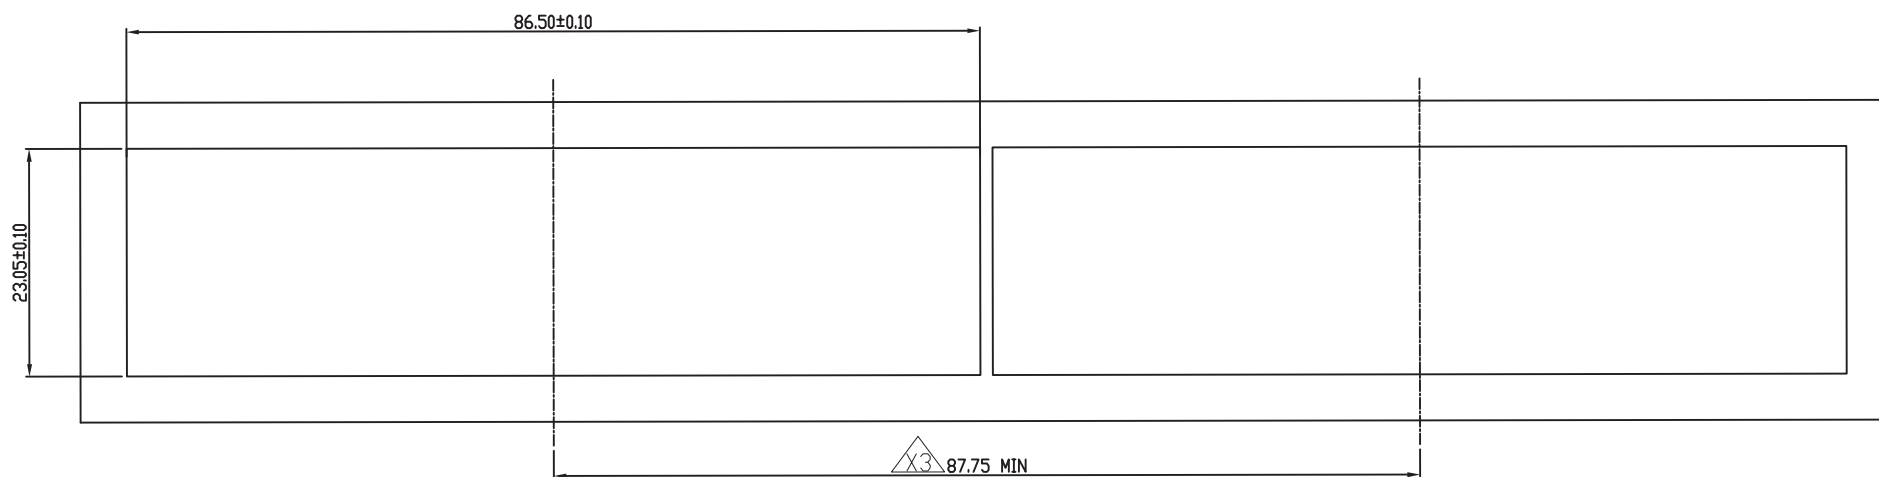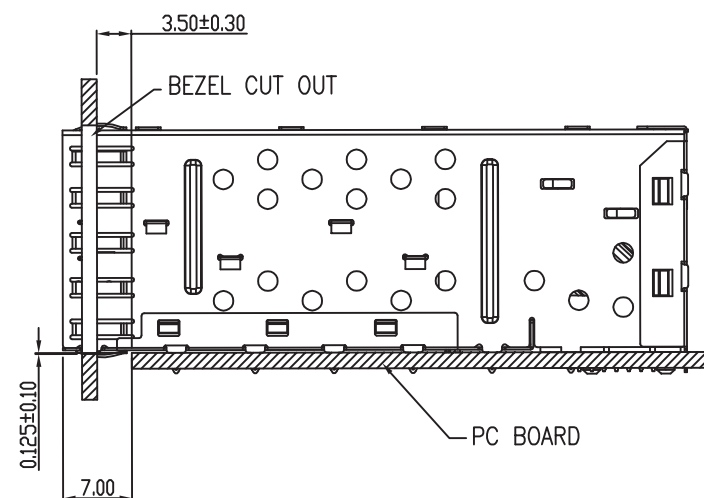

RoHS Compliant

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:SFP 2\*6  
CONNECTOR LOW PROFILE

SIZE  
A4

UNITS  
MM[INCH]

GENERAL TOLERANCES  
UNLESS SPECIFIED

APPROVED BY:  
Geoffrey.Song

PART NO.:  
WHSFP06326F001

SACLE  
1:1

REV  
A0


$x \pm 0.35$   
 $x \pm 0.30$

$x^\circ \pm 3.0^\circ$   
 $x^\circ \pm 2.0^\circ$

CHECKED BY:  
Elvis.Song

REMARK:  
PLATE GOLD 30u"

SHEET  
2/4



$.xx \pm 0.25$   
 $.xxx \pm 0.10$



$.xx^\circ \pm 1.5^\circ$   
 $.xxx^\circ \pm 1.0^\circ$

DESIGND BY:  
Sunny.Xu

TEL: +86 400 1048 018

WEB: [WWW.WOHU-TEK.COM](http://WWW.WOHU-TEK.COM)

CUSTOMER DRAWING

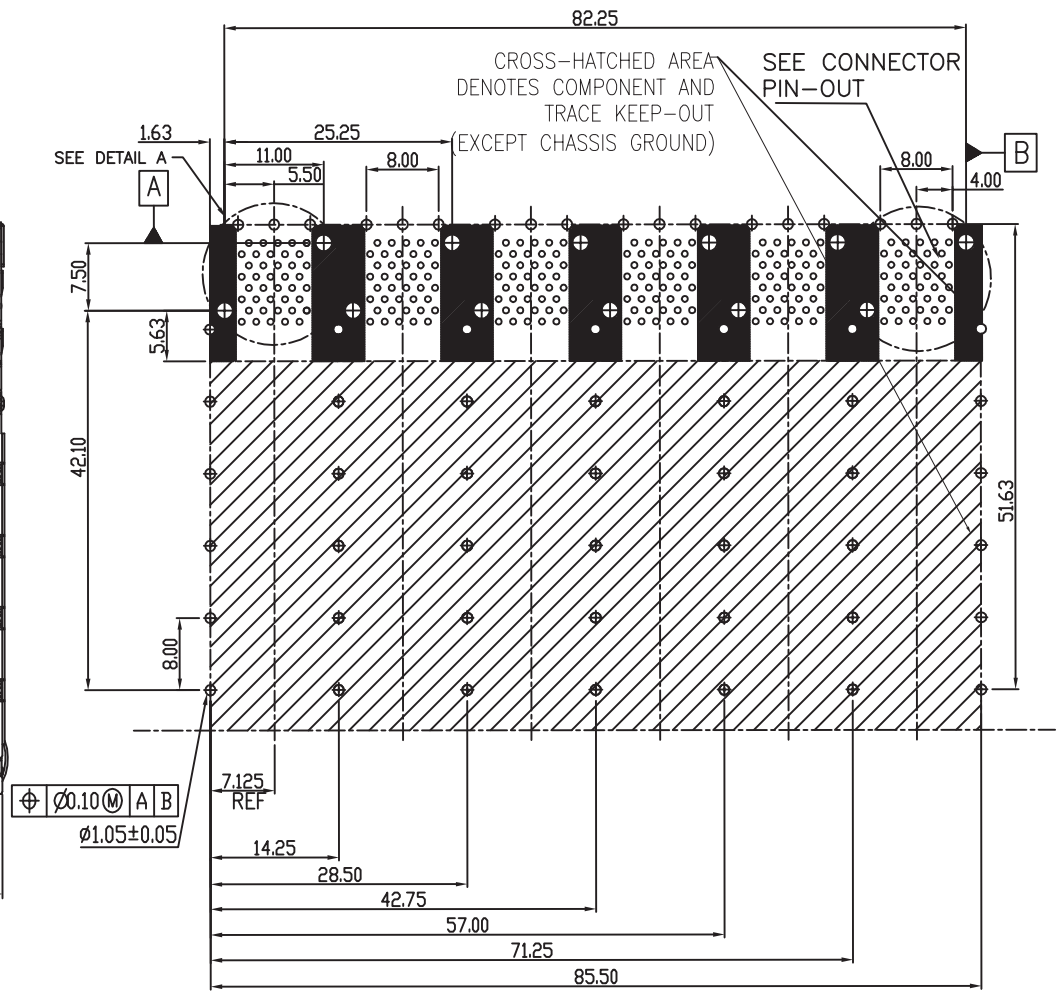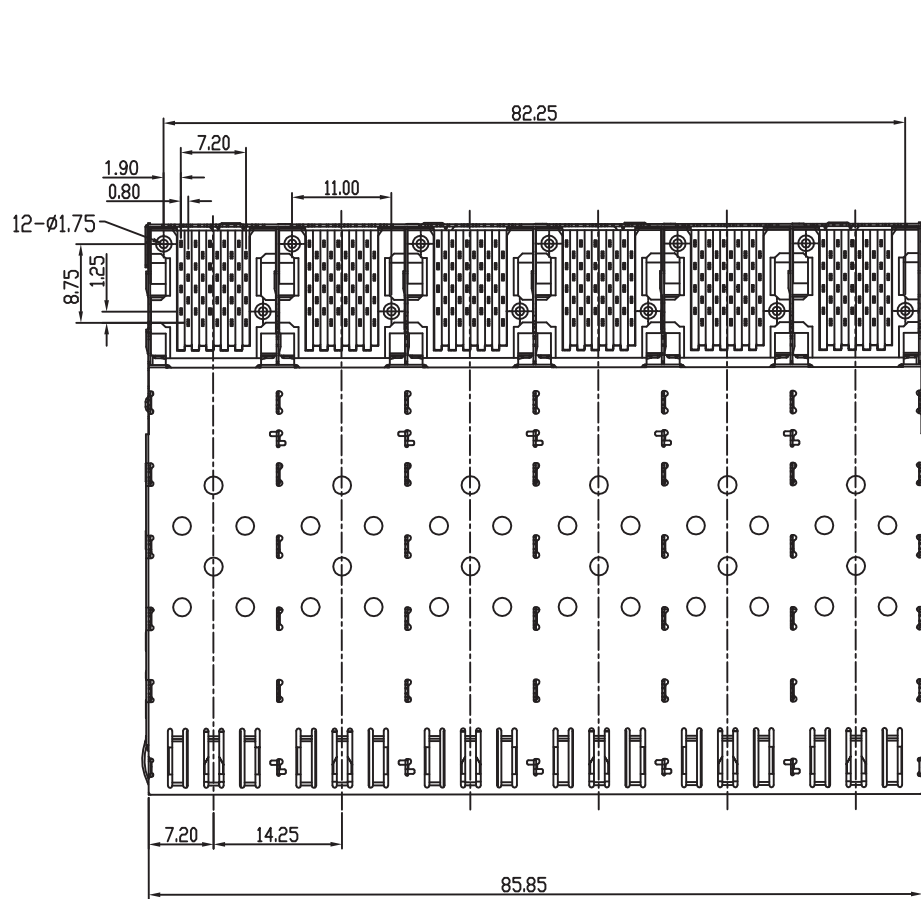

RoHS Compliant

**VOOHU** 苏州沃虎电子科技有限公司  
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: SFP 2\*6  
CONNECTOR LOW PROFILE

SIZE  
A4

UNITS  
MM[INCH]

GENERAL TOLERANCES  
UNLESS SPECIFIED

APPROVED BY:  
Geoffrey.Song

PART NO.:  
WHSFP06326F001

SACLE  
1:1


REV  
A0

$x \pm 0.35$   
 $x \pm 0.30$

CHECKED BY:  
Elvis.Song

REMARK:  
PLATE GOLD 30u"

SHEET  
3/4




$.xx \pm 0.25$   
 $.xxx \pm 0.10$



DESIGN BY:  
Sunny.Xu

TEL: +86 400 1048 018

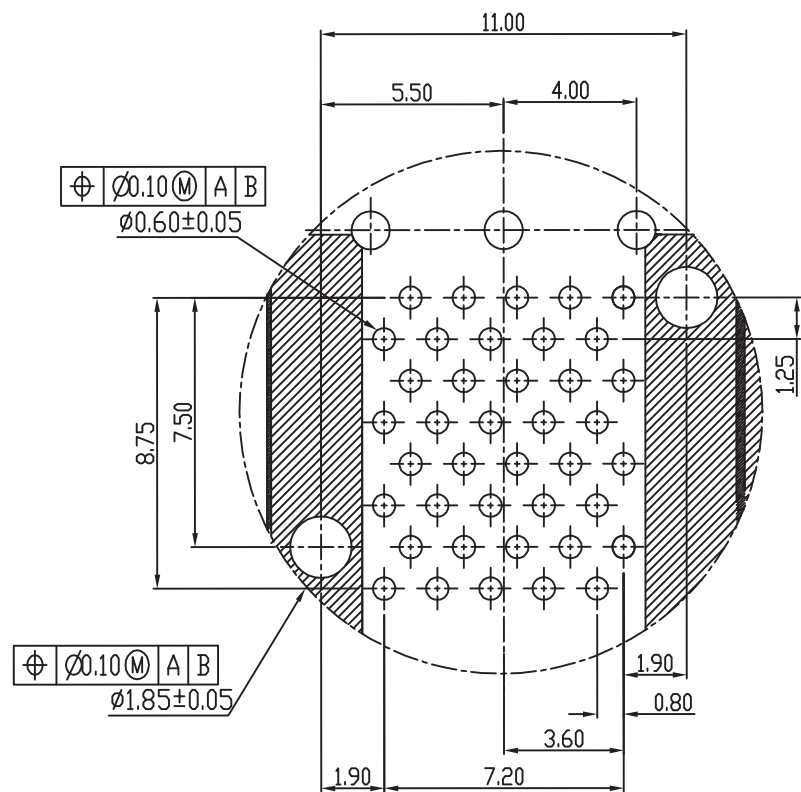WEB: [WWW.WOHU-TEK.COM](http://WWW.WOHU-TEK.COM)



DETAIL A  
SCALE 6:1

<div> 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd</div>		TITLE: SFP 2*6 CONNECTOR LOW PROFILE	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: WHSFP06326F001	SACLE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018	WEB: <a href="http://WWW.WOHU-TEK.COM">WWW.WOHU-TEK.COM</a>	REMARK: PLATE GOLD 30u”	SHEET 4/4		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu
					.xxx±0.10	.xxx°±1.0°	